

Accepted manuscript doi: 10.1680/jgeot.18.p.277

Accepted manuscript

As a service to our authors and readers, we are putting peer-reviewed accepted manuscripts (AM) online, in the Ahead of Print section of each journal web page, shortly after acceptance.

Disclaimer

The AM is yet to be copyedited and formatted in journal house style but can still be read and referenced by quoting its unique reference number, the digital object identifier (DOI). Once the AM has been typeset, an 'uncorrected proof' PDF will replace the 'accepted manuscript' PDF. These formatted articles may still be corrected by the authors. During the Production process, errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal relate to these versions also.

Version of record

The final edited article will be published in PDF and HTML and will contain all author corrections and is considered the version of record. Authors wishing to reference an article published Ahead of Print should quote its DOI. When an issue becomes available, queuing Ahead of Print articles will move to that issue's Table of Contents. When the article is published in a journal issue, the full reference should be cited in addition to the DOI.

Accepted manuscript doi: 10.1680/jgeot.18.p.277

Submitted: 24 October 2018

Published online in ‘accepted manuscript’ format: 06 December 2019

Manuscript title: PISA Design Model for Monopiles for Offshore Wind Turbines:
Application to a Marine Sand

Authors: Harvey J. Burd*, David M. G. Taborda[†], Lidija Zdravković[†], Christelle N. Abadie[‡],
Byron W. Byrne*, Guy T. Houlsby*, Kenneth G. Gavin[§], David J. P. Igoe^{||}, Richard J.
Jardine[†], Christopher M. Martin*, Ross A. McAdam*, Antonio M. G. Pedro[¶] and David M.
Potts[†]

Affiliations: *Department of Engineering Science, Oxford University, Oxford, UK;

[†]Department of Civil and Environmental Engineering, Imperial College London, London,

UK; [‡]Department of Engineering, Cambridge University, Cambridge, UK; formerly

Department of Engineering Science, Oxford University, Oxford, UK; [§]Delft University of

Technology, Delft, the Netherlands; formerly School of Civil Engineering, University

College Dublin, Dublin, Ireland; ^{||}Trinity College, Dublin, Ireland; formerly School of Civil

Engineering, University College Dublin, Dublin, Ireland; [¶]ISISE, Department of Civil

Engineering, University of Coimbra, Portugal; formerly Department of Civil and

Environmental Engineering, Imperial College London, London, UK

Corresponding author: Byron W. Byrne, Department of Engineering Science, Oxford
University, Oxford, UK.

E-mail: byron.byrne@eng.ox.ac.uk

Abstract

This paper describes a one dimensional (1D) computational model for the analysis and design of laterally-loaded monopile foundations for offshore wind turbine applications. The model represents the monopile as an embedded beam and specially-formulated functions, referred to as soil reaction curves, are employed to represent the various components of soil reaction that are assumed to act on the pile. This design model was an outcome of a recently-completed joint industry research project – known as PISA – on the development of new procedures for the design of monopile foundations for offshore wind applications. The overall framework of the model, and an application to a stiff glacial clay till soil, is described in a companion paper (Byrne et al. 2019b); the current paper describes an alternative formulation that has been developed for soil reaction curves that are applicable to monopiles installed at offshore homogenous sand sites, for drained loading. The 1D model is calibrated using data from a set of three dimensional finite element analyses, conducted over a calibration space comprising pile geometries, loading configurations and soil relative densities that span typical design values. The performance of the model is demonstrated by the analysis of example design cases. The current form of the model is applicable to homogeneous soil and monotonic loading, although extensions to soil layering and cyclic loading are possible.

INTRODUCTION

Monopiles are typically the preferred foundation option for offshore wind turbine support structures in shallow coastal waters. Current design procedures for monopile foundations routinely employ a simplified analysis procedure, known as the ‘ p - y ’ method, in which the foundation is modelled as an embedded beam, with the lateral load-displacement interaction between the soil and pile represented by nonlinear functions known as ‘ p - y curves’.

The p - y method was originally devised for the design of the long, relatively flexible, piles that are typically employed in offshore oil and gas structures. The method was initially based on data from field tests reported some decades ago (e.g. Matlock 1970, Cox et al. 1974); early p - y curve specifications were proposed by Matlock (1970) (for clays) and Reese et al. (1974) (for sands). Although the method has evolved in the intervening years (e.g. Doherty and Gavin et al. 2011), current standard forms of the p - y method as specified in design guidance documents (e.g. API 2010 and DNV-GL 2016) remain broadly unchanged from this early work. Certain questions exist, however, on the extent to which standard forms of the method are applicable to offshore wind turbine monopiles, which typically employ relatively large diameters, D , and low values of L/D (where L is embedded length) and are therefore relatively stiff. Evidence highlighting the shortcomings of the conventional p - y method for monopile design applications has been observed in laboratory tests (e.g. Klinkvort et al. 2016; Choo and Kim 2015) and at field scale (Li et al. 2017, Hu and Zhang 2018, Kallehave et al. 2015).

This paper describes a new analysis procedure, referred to as the ‘PISA design model’, for monotonic lateral and moment loading of monopiles. This design model is an outcome of a research project – known as PISA – that included field testing (Zdravković et al. 2019a, Burd et al. 2019, Byrne et al. 2019c, McAdam et al. 2019) at two onshore sites (stiff clay at Cowden, dense sand at Dunkirk) and three dimensional (3D) finite element modelling (Zdravković et al. 2019b, Taborda et al. 2019). The PISA design model retains the underlying simplicity of the p - y method (in which the pile is modelled as an embedded beam), but additional soil reaction components are incorporated to improve the model’s performance. The model is calibrated with a set of 3D finite element calibration analyses; it therefore benefits from the realism that is potentially achievable with 3D finite element modelling, whilst also being rapid to compute. The PISA design model supports a wide range of practical design calculations; it is applicable to (i) the determination of small displacement foundation stiffness (relevant to the development of dynamic models for the overall structure) (ii) the analysis of serviceability limit states (i.e. relating to the displacements that occur under normal working conditions) and (iii) analysis of ultimate limit states (to check for overall stability).

This paper describes the development and implementation of the PISA design model for monopiles installed in homogeneous sand for drained monotonic loading. In a companion paper, Byrne et al. (2019b), the overall framework of the PISA design model is described, together with a calibration process for piles embedded in glacial clay till. The approaches employed for the clay and sand PISA design model formulations differ only in the manner in which the soil reaction components are incorporated and the way in which the model is

calibrated. The particular aspects of the model that relate to the sand implementation are referred to in the current paper as the ‘sand modelling framework’.

To develop the PISA design model in a form that is applicable to sands within a practical range of densities, a set of four hypothetical representative offshore homogeneous sand sites is established, each with a specific relative density (D_R of 45%, 60%, 75% and 90%). The geotechnical conditions at these sites, and the modelling employed in the 3D calibration analyses, are based on the prior geotechnical characterisation of the Dunkirk site (Zdravković et al. 2019a) and the finite element analyses that were shown in Taborda et al. (2019) to provide a close representation of the PISA test piles at Dunkirk. The PISA design model calibration process therefore has a link, albeit an indirect one, with observations on the performance of the PISA test piles. Independent PISA design model calibrations are described for each representative site, and an optimisation process is employed to define a general model - referred to as the ‘General Dunkirk Sand Model’ (GDSM) - that is applicable to soils with an arbitrary value of relative density in the range $45\% \leq D_R \leq 90\%$. The predictive capabilities of the GDSM are demonstrated by conducting analyses for monopile configurations within the calibration space, but that differ from the calibration cases.

The PISA Design Model

Model overview

The PISA design model provides a one dimensional (1D) representation of a monopile foundation subject to the application of a lateral load, H , applied at a distance h above seabed level (referred to in this paper as ‘ground-level’) as illustrated in Fig. 1. The monopile is represented as an embedded beam with moment M_G and lateral force H_G applied to the pile at ground-level, Fig. 2. Four components of soil reaction are assumed to act on the monopile. Consistent with the standard p - y method, a distributed lateral load, p (units of force/length) acts on the pile. Additionally, a distributed moment, m (units of force \times length/length) is applied; this distributed moment arises as a consequence of the vertical tractions that are induced on the pile perimeter when relative vertical displacements occur at the soil-pile interface, e.g. due to local rotation of the pile cross-section. A lateral force H_B and a moment M_B acting on the base of the pile are also included. The monopile is represented by Timoshenko beam theory; this allows the shear strains in the pile to be incorporated in the analysis in an approximate way. Since the influence of the shear strains on the overall pile deformation is likely to increase as L/D is reduced, the use of Timoshenko theory provides a means of maintaining the robustness of the approach as L reduces or D is increased (e.g. see Gupta and Basu, 2018). A four-component model of this sort has previously been employed for the design of drilled shafts for onshore applications (e.g. Lam 2013) and has been described in the context of the PISA research by Byrne et al. (2015), Byrne et al. (2017) and Burd et al. (2017). As discussed in Byrne et al. (2019b), vertical loads are assumed to have an insignificant influence on the performance of the monopile; they are therefore excluded from the model.

The soil reactions are applied to the embedded beam using a generalised form of the Winkler assumption, in which the force and moment reactions are assumed to be related only to the local pile displacement and rotation. Functions employed in the model to relate the soil

reactions and the local pile displacements (and rotations) are termed ‘soil reaction curves’. Although the Winkler approach neglects the coupling that inevitably occurs within the soil, it provides a convenient basis for design calculations, as demonstrated by the widespread use of the p - y method. A fundamental feature of the approach, however, is that soil reaction curves determined on the basis of the Winkler assumption are unlikely to be unique. Appropriate soil reaction curves may depend, for example, on the relative magnitude of the translational and rotational movements of the pile. It is considered necessary, therefore, to calibrate the soil reaction curves using pile deformation modes that are representative of those that are likely to be experienced by actual wind turbine monopile foundations. The PISA design model is therefore calibrated within a design space that is carefully selected to represent realistic loading conditions.

The PISA design model reduces to the standard p - y approach when m , H_B and M_B are set to zero (and appropriate choices are made on the relationship between the distributed lateral load, p and the local lateral pile displacement, v). Experience has shown, however, that the m , H_B and M_B components become increasingly significant as L/D is reduced (Byrne et al. 2015; Byrne et al. 2019b). The distributed moment component, for example, depends on pile diameter, increasing as the pile diameter is increased. Similarly, the force and moment reactions H_B and M_B at the base of the pile become more significant as the pile diameter is increased. The four-component model in Fig. 2b therefore provides a rational way of addressing a shortcoming of the p - y method, often referred to as the ‘diameter effect’, in which the standard p - y curves (e.g. API 2010, DNV-GL 2016) are typically found to become increasingly unreliable as the pile diameter is increased, or the length is reduced (e.g. Alderlieste et al. 2011, Doherty and Gavin 2011).

Soil reaction curves for the sand modelling framework

The soil reaction curves employed in the PISA design model are based on the use of dimensionless forms of the relevant soil reaction and displacement/rotation variables. This provides a convenient means of developing standard forms that, for numerical implementation, can be scaled to represent the soil reactions acting on the pile at an arbitrary depth. These dimensionless forms are specified in Table 1, where σ'_{vi} is the local value of initial vertical effective stress in the soil, G_0 is the local value of soil small-strain shear modulus, v and ψ are the local pile lateral displacement and cross-section rotation respectively.

The soil reactions are implemented in the model using an appropriately calibrated algebraic function. The function selected for this purpose is, to an extent, arbitrary, provided that it is capable of providing a realistic representation of the soil reactions for behaviour ranging from small displacements (needed, for example, to predict the natural frequencies of a wind turbine structure) to the large displacement response (required for the calculation of the ultimate limit state).

The current implementation of the PISA design model employs the four-parameter conic function,

$$-n \left(\frac{\bar{y}}{\bar{y}_u} - \frac{\bar{x}}{\bar{x}_u} \right)^2 + (1 - n) \left(\frac{\bar{y}}{\bar{y}_u} - \frac{\bar{x}k}{\bar{y}_u} \right) \left(\frac{\bar{y}}{\bar{y}_u} - 1 \right) = 0 \quad (1)$$

where \bar{x} signifies a normalised displacement or rotation variable and \bar{y} signifies the corresponding normalised soil reaction component, formulated in terms of the dimensionless forms in Table 1. The function is illustrated in Fig. 3. The normalised soil reactions can be determined explicitly from the normalised displacements by,

$$\bar{y} = \bar{y}_u \frac{2c}{-b + \sqrt{b^2 - 4ac}}; \quad \bar{x} \leq \bar{x}_u$$

$$\bar{y} = \bar{y}_u; \quad \bar{x} > \bar{x}_u \quad (2)$$

where,

$$a = 1 - 2n \quad (3)$$

$$b = 2n \frac{\bar{x}}{\bar{x}_u} - (1 - n) \left(1 + \frac{\bar{x}k}{\bar{y}_u}\right) \quad (4)$$

$$c = \frac{\bar{x}k}{\bar{y}_u} (1 - n) - n \frac{\bar{x}^2}{\bar{x}_u^2} \quad (5)$$

The parameters ($k, \bar{y}_u, \bar{x}_u, n$) each have a straightforward interpretation. The parameter k specifies the initial slope; \bar{y}_u is the ultimate value of the normalised soil reaction and \bar{x}_u is the normalised displacement (or rotation) at which this ultimate value of soil reaction is reached. The parameter n ($0 \leq n \leq 1$) determines the shape of the curve; for the extreme values $n = 0$ and $n = 1$, the function reduces to the bi-linear forms illustrated in Fig. 3b. As discussed in Byrne et al. (2019b), no particular importance is attached to the specific form that is chosen for the parametric curve, and other similar parametric functions would be possible.

For the distributed lateral load, and the base horizontal load and moment components, dimensional forms of the soil reaction curves, and their derivatives, for numerical implementation of the model, are determined straightforwardly using local values of G_0 and σ'_{vi} , on the basis of the dimensionless forms in Table 1. The particular normalisation adopted for the distributed moment, however, means that a different treatment is required in this case. During the initial model development process, data from the 3D calibration calculations suggested that the distributed moment, m , appeared to scale with the current value of the local distributed lateral load, p . Since the vertical tractions induced on the pile perimeter arise as a consequence of friction at the soil-pile interface, it seems plausible that the magnitude of the distributed moment correlates with the local normal tractions; in turn, these tractions are closely related to the local distributed lateral load. It was therefore decided to adopt a dimensionless form for the distributed moment, \bar{m} , by normalising the distributed moment by the local value of the distributed load, as indicated in Table 1. The use of this form for \bar{m} implies that the distributed moment is a function of both the local displacement, v , and the local pile cross-section rotation, ψ ,

$$m(v, \psi) = \sigma_{vi} D^2 \bar{p} \left(\frac{v G_0}{D \sigma_{vi}} \right) \bar{m} \left(\frac{\psi G_0}{\sigma_{vi}} \right) \quad (6)$$

This coupling has certain implications for the numerical implementation of the model (described in Appendix A).

1D finite element formulation for the sand modelling framework

The PISA design model employs the 1D representation finite element framework illustrated in Fig. 2b. The pile is represented by a line mesh of two-noded Timoshenko beam elements, employing the formulation in Astley 1992. The calculations described in this paper were all conducted with a shear factor $\kappa = 0.5$. In the current form of the model, consistent with the

shell element formulation employed in the 3D finite element calibration calculations, the structural properties (area and second moment of area) are specified for the beam elements using the thin-walled approximation. Soil finite elements, with the same displacement and rotation interpolation functions that are used for the beam elements, are connected to the beam elements along the embedded length of the pile. A virtual work statement of the problem, and an outline of the development of the finite element equations in Galerkin form, is provided in Byrne et al. (2019b). Consistent with the approach adopted for the clay framework described in Byrne et al. (2019b), four Gauss points per element are adopted for both the beam and soil elements to determine the stiffness matrices and internal force vectors. Further specific implementation details for the sand modelling framework are given in Appendix A.

REPRESENTATIVE OFFSHORE SAND SITES

In connection with the PISA research, a series of pile tests (McAdam et al. 2019) were conducted at an onshore site in Dunkirk in northern France; at this site the soil consists principally of a dense Flandrian sand with a surface layer (about 3m thick) of dense hydraulically-placed sand with the same geological origin as the deeper Flandrian deposit (Chow 1997). This site was carefully characterised during the field testing program (Zdravković et al. 2019a); it was convenient, therefore, to adopt the soil conditions at this site as the basis of the representative offshore sites developed to calibrate the PISA model for sand.

A detailed finite element study (Taborda et al. 2019) was undertaken during the PISA project to support the Dunkirk pile tests. The constitutive model employed for these analyses, described in (Taborda et al. 2014), is an evolution of the bounding surface model originally proposed by Manzari and Dafalias (1997). A detailed procedure to calibrate this constitutive model for the soil conditions at the Dunkirk test site, described in Taborda et al. (2019), was conducted. The constitutive model and associated parameters (Table 3) that were developed to model the Dunkirk test piles are adopted for the representative offshore site calibration calculations employed in the current work.

The ground conditions at Dunkirk have certain features not present at typical offshore sites. These are; (i) a very dense hydraulically-placed surface layer, (ii) the surface soil layers are partially saturated, as a consequence of the water table being observed to be 5.4m below the ground surface, and (iii) the superficial layers are possibly lightly cemented. Adjustments to the Dunkirk soil conditions were therefore required to develop plausible representative offshore ground models; these adjustments involved (a) excluding the surface layer of hydraulic fill from the model, and (b) employing a hydrostatic pore pressure distribution. Other aspects of the representative offshore ground models were taken directly from the data in Taborda et al. (2019) on the naturally-occurring Flandrian sand at Dunkirk. The constitutive model and calibration data developed to support the Dunkirk field tests, (Taborda et al. 2019) were employed directly to characterise the representative ground models for the current study; the only parameter requiring adjustment is the relative density.

The relative density for the natural Flandrian sand at Dunkirk was estimated as $D_R = 75\%$; corresponding to an initial void ratio e_o of 0.628. This relative density was adopted for one of the representative offshore ground models for the current study. Three additional

representative ground models were developed, with $D_R = 45\%$, 60% and 90% , see Table 2. The initial stresses were determined by adopting hydrostatic pore pressure conditions with a submerged unit weight of $\gamma' = 10.09 \text{ kN/m}^3$ and $K_0 = 0.4$ (both values correspond to data for the Dunkirk site). Variations in the submerged unit weight of the sand due to different values of relative density were not considered, as the effect of varying this parameter is regarded as minimal with respect to other aspects of sand behaviour. The small strain shear modulus, G_0 , is obtained from the local values of mean effective stress p' and initial void ratio e_0 (from Table 2) using the relationship proposed by Hardin and Black (1968),

$$G_0 = \frac{B p'_{ref}}{0.3 + 0.7 e_0^2} \sqrt{\frac{p'}{p'_{ref}}} \quad (7)$$

where B , determined from the site investigation data (Zdravković et al. 2019a) the calibration process described in Taborda et al. (2019), is specified in Table 3 and $p'_{ref} = 100 \text{ kPa}$.

3D FINITE ELEMENT CALIBRATION CALCULATIONS

Specification of the finite element calculations

3D finite element calibration calculations have been conducted for a calibration space consisting of monopile dimensions and load eccentricities, h , in the range $5\text{m} \leq D \leq 10\text{m}$, $2 \leq L/D \leq 6$, $5 \leq h/D \leq 15$ for each representative site. These dimensions were selected to span a realistic design range for current and future monopiles, on the basis of advice received from the project partners (listed in the Acknowledgements). The configurations employed in this set of pile calibration analyses, selected to provide appropriate coverage of the selected calibration space, are listed in Table 4. The analyses were conducted using the finite element software ICFEP (Potts and Zdravković, 1999, 2001). A total of 38 calibration analyses were conducted (Table 8).

Procedures to calibrate the model were initially developed on the basis of the $D_R = 75\%$ representative site. This initial calibration exercise was conducted for all of the calibration piles in Table 4. It is noted that piles C3 and C7 (incorporated in the pile calibration set to check whether the inferred soil reaction curves are influenced by pile wall thickness) are similar to C1 and C6 respectively, except for differences in wall thickness. Results from the $D_R = 75\%$ calibration indicated that the influence of wall thickness on the soil reaction curves is negligible; piles C3 and C7 were therefore excluded from the calibration sets employed for the other representative sites.

Results from the $D_R = 75\%$ calibration are employed later in the paper to illustrate the various stages in the calibration process.

Modelling procedures

The 3D finite element calculations employed a critical state constitutive model, based on the state parameter framework for sands (Taborda et al. 2014), to represent the soil at the representative sites. The state parameter framework employed in the model ensures that the influence of soil void ratio, and mean effective stress, on the mechanical behaviour of soil is accounted for in a consistent way, i.e. without the need to adjust the model parameters for soils with different relative densities. The constitutive parameters employed in the analyses

(determined as described in Taborda et al. 2019) are listed in Table 3. It is noted that these constitutive parameters were developed for monotonic loading and have not been calibrated for cyclic loads.

A typical mesh employed for the calibration analyses (for pile C4) is shown in Fig. 4. By exploiting symmetry in the geometry and in the applied load, only half of the problem is discretised. The soil domain is represented with 10530 20-noded hexahedral displacement-based solid elements. A refined mesh is employed for the soil in the region below the base of the pile to ensure that the computed base reactions are reliable. The embedded pile is discretised with 360 8-noded shell elements (Schroeder et al., 2007) arranged in 30 rings of elements; distributed load and moment soil reactions curves could therefore be extracted from the calibration analyses at 30 discrete depths. The above-ground extension is modelled with 240 shell elements. The interface between the soil and the pile exterior is modelled with 360 16-noded zero-thickness interface elements (Day and Potts, 1994). Fully rough boundary conditions are prescribed to the base of the mesh and a zero normal displacement boundary condition was prescribed to the vertical cylindrical boundary (at a radial distance of 100 m from the pile central axis).

No attempt is made to model the stress and state changes that occur in the soil due to the pile installation process. Instead, the monopile is modelled as ‘wished in place’; it is incorporated in the finite element mesh at the start of the analysis in a fully plugged configuration. A similar wished in place procedure was employed in the 3D finite element models that were developed to analyse the Dunkirk PISA test piles (Taborda et al. 2019).

The interface between the exterior of the embedded monopile and the soil is represented by an elasto-plastic Mohr-Coulomb model. The elastic part of the interface model is defined by a shear and a normal stiffness, both set to $1.0 \times 10^5 \text{ kN/m}^3$, and the plastic part by zero cohesion ($c' = 0$) and an angle of shearing resistance (32°) that is equal to the triaxial compression critical state friction angle. The monopile is modelled as an elastic material with properties representative of steel; Young’s modulus $E = 200 \text{ GPa}$ and Poisson’s ratio $\nu = 0.3$. The pile wall thickness is specified as an additional model parameter.

Loading is applied to the top of the pile in a displacement controlled manner, by prescribing increments of uniform horizontal displacements in the y-direction around the half-perimeter of the pile. The resulting load is obtained as a reaction to these prescribed displacements; its magnitude is one half of the total lateral load, H , acting on the pile.

NUMERICAL SOIL REACTION CURVES

Numerical representations of the soil reaction curves (referred to as ‘numerical soil reaction curves’) for the distributed lateral load and moment components were determined from the 3D finite element analyses by extracting the nodal forces acting at the soil-pile interface, and the stresses in the interface elements between the pile exterior and the soil. The force and moment reactions at the pile base were determined by integrating the stresses in the layer of soil elements immediately below the pile base, and incorporating the reactions computed from the nodal forces at the base of the shell elements representing the pile. Local lateral displacements and cross-section rotations of the pile were determined from the computed displacements of the relevant shell element nodes by averaging over the cross-section (for displacement) and by least-squares fitting on the vertical displacements (for rotation).

Checks were conducted to confirm that the computed nodal forces acting on the monopile boundary were in equilibrium with the externally-applied lateral load (within an acceptable tolerance). If boundary checks were satisfactory, then the data were further processed to develop the soil reaction curves, as described below. Alternatively, if this boundary equilibrium check indicated the presence of unacceptable equilibrium errors, then the 3D analyses were repeated using a tighter calculation tolerance. For the calibration calculations (listed in Table 8) a maximum equilibrium error of 1.81% was achieved; this level of equilibrium error is considered to be well within the bounds of acceptability.

Check calculations were conducted using a form of the 1D model, referred to as ‘1D (numerical)’, that is based directly on the numerical soil reaction curves. In this approach, dimensionless forms of the numerical soil reaction curves are determined using the normalisations in Table 1. Normalised numerical soil reaction curves at the depth location of each Gauss point in the 1D model are computed by interpolation; the corresponding dimensional forms are then determined on the basis of the local values of σ'_{vi} and G , and the dimensionless form definitions in Table 1. The $H - v_G$ performance (where v_G is ground-level pile displacement) computed using the 1D (numerical) model for piles C1 ($L/D = 2$) and C4 ($L/D = 6$) for $D_R = 75\%$ is shown in Fig. 5. The 1D (numerical) model is seen to provide a close fit to the 3D finite element calibration data. A similarly close match is obtained for other calibration piles (data not presented here). These checks confirm that the procedures used to determine the numerical soil reaction curves are robust. They also indicate a likely upper bound on the accuracy of the PISA modelling approach.

Separate 1D (numerical) calculations have been conducted to investigate the significance of individual soil reaction components. Example results for piles C1 and C4 for $D_R = 75\%$, for cases where soil reaction components are selectively excluded from the model are also shown in Fig. 5. In Case P, only the distributed lateral load terms are included; in Case PM, only the distributed lateral load and distributed moment terms are included. It is clear from Fig. 5(b) that the lateral distributed load is the dominant soil-pile interaction mechanism for the relatively long pile, C4 (i.e. the Case P data match closely the 1D (numerical) results)). For the shorter pile (C1) Fig. 5(a), however, the Case P data differ significantly from the 1D (numerical) model, indicating that, in this case, neglecting the three other soil reaction components causes a significant loss of fidelity. The Case PM data provide an improved fit for pile C1, indicating the importance of the distributed moment in this case. These results confirm the pattern observed in Byrne et al. (2019b) for a stiff glacial clay till, that for relatively long piles a p - y type method (distributed lateral load only) is capable of providing a robust model of the load-displacement behaviour, but that additional soil reaction components need to be included for piles with relatively low values of L/D .

Quantitative comparisons between the performance of the 1D and 3D models employ the ‘accuracy metric’, η ,

$$\eta = \frac{A_{ref} - A_{diff}}{A_{ref}} \quad (8)$$

where the meaning of A_{ref} and A_{diff} are illustrated in Fig. 6. A ‘ratio metric’, defined by,

$$\rho = \frac{H_{1D}}{H_{3D}} \quad (9)$$

is also employed, where H_{1D} and H_{3D} are values of lateral force, computed from the 1D and 3D models respectively, at particular values of v_G , as shown on Fig. 6. The accuracy metric, η , evaluates the precision of the overall fit (and is expected to be close to 1), whilst the ratio

metric, ρ , indicates whether the model under-predicts (<1) or over-predicts (>1) the 3D finite element model at a specified value of ground-level pile displacement.

Accuracy metric values have been computed for the 1D (numerical) model for ‘ultimate displacements’ η_{ult} determined for $0 < v_G < D/10$ and ‘small displacements’, η_{sd} determined for $0 < v_G < D/10,000$ for all of the piles in the calibration set for all relative densities. For $D_R = 75\%$, the accuracy metrics are in the range 0.92 to 0.98 for η_{ult} and 0.89 to 0.98 for η_{sd} . Values of the ratio metric evaluated at $v_G = D/10$ and $v_G = D/10,000$ for $D_R = 75\%$, are in the range 0.93 to 1.07 and 0.88 to 1.08 respectively. These results indicate a close match between the 1D (numerical) model and the 3D calibration data. Similarly close agreement was obtained for the other relative density cases.

PARAMETRIC SOIL REACTION CURVES

Selection and calibration of the parametric soil reaction curves

For a practical design tool, general forms of the soil reaction curves are required that are applicable to pile configurations not included in the calibration set. The current form of the PISA design model employs the four-parameter form in Eqn. 1 to represent the soil reaction curves. Soil reaction curves based on this function are referred to as ‘parametric soil reaction curves’.

Values of the parameters required to fit the parametric soil reaction curves to the numerical data for each particular relative density are determined via a two-stage process, conducted over the full set of piles in each calibration set. A final, third, stage is employed to determine the calibration parameters for the General Dunkirk Sand Model (GDSM). These calibration procedures are described below and summarised in Fig. 7.

The conic function employed to represent the soil reactions is intended for $\bar{x}, \bar{y} \geq 0$ only (i.e. in the positive quadrant). Depending on the direction of the applied load and the adopted sign convention, values of \bar{x}, \bar{y} extracted from the calibration analyses may be negative. Also, for the distributed load and moment components, the direction of \bar{x}, \bar{y} may vary with position along the pile. The process of fitting the conic function to the numerical data is conducted by first mapping all of the numerical data into the positive quadrant. In the subsequent implementation in the 1D finite element model, the soil reaction curves for the full range of \bar{x} (positive and negative) are specified on the basis that the response in the third quadrant ($\bar{x}, \bar{y} < 0$) is identical to that in the first quadrant, but with appropriate sign changes.

First stage calibration

Distributed lateral load soil reaction curves. Example data, for pile C4; $D_R = 75\%$, on the normalised distributed lateral load numerical soil reaction curves at selected depths, z , are shown in Fig. 8(a). At shallow depths, (i.e. $z/D = 0.23$ and 1.08) where the displacements are relatively large, a peak, followed by post-peak softening, is apparent in the numerical curves. This behaviour is likely associated with the dilation characteristics of the soil as represented in the calibration analyses, and was typically observed in the distributed lateral load numerical data. Since softening cannot be represented with the selected conic function, a simplified representation is adopted. At greater depths (e.g. $z/D = 2.33$ and 5.97 in Fig. 8a) the soil reaction curve does not reach a peak. The following calibration process is adopted:

- (i) The value of the ultimate normalised lateral load, \bar{p}_u is taken as the value of the numerical soil reaction curve at large displacement (i.e. the final increment of the analysis). For softening behaviour, this value of \bar{p}_u is initially reached earlier in the analysis; in this case the ultimate normalised displacement \bar{v}_{pu} is selected as the value at the first increment of the numerical soil reaction curve at which \bar{p}_u is exceeded. Otherwise \bar{v}_{pu} is taken as the value at the final analysis increment.
- (ii) The initial stiffness k_p is determined by proportional least-squares fitting the linear expression $\bar{p} = k_p \bar{v}$ to the numerical soil reaction curve for $0 < \bar{p} < 0.1$.
- (iii) The curvature parameter n_p , is determined by minimising the proportional least square error between the numerical data and the conic function, for the full range of the data.

Distributed lateral load parameters determined for all of the piles in the calibration set, for $D_R = 75\%$, are plotted in Fig. 9. To develop functions (referred to as ‘depth variation functions’) to represent the dependency of the parameters on depth, z , it is convenient to employ normalised depth parameters that collapse the data (as far as possible) onto a single variable. Adopting a normalised depth z/D for k_p and n_p , and an alternative normalised depth z/L for \bar{v}_{pu} and \bar{p}_u , appeared to provide the best approach; the parameters are plotted with respect to these normalised depth variables in Fig. 9 for all of the piles in the calibration set for $D_R = 75\%$.

The data in Fig. 9 exhibit a certain amount of variability and scatter along the pile. Some of these patterns can be related directly to physical aspects of the problem. For example, the cluster of points in Fig. 9(a) with relatively high values of k_p close to $z/D = 2$ all relate to the short monopiles $L/D = 2$ employed in the calibration set. It appears that these short, relatively stiff, monopiles attract a larger lateral soil stiffness near their base than the more flexible $L/D = 6$ piles. The apparent discontinuity in the k_p data close to $z/D = 2.6$ is associated with the behaviour of the $L/D = 6$ piles near to the pivot point (where the direction of the lateral displacements changes sign with increasing depth). A similar influence of the pivot point (the location of the pivot tends to increase in depth as displacements increase) is seen in the data in Fig 9(c). Other features of Fig. 9 relate to the calibration process. For example, the soil near to the base of the $L/D = 6$ piles was not taken to failure in the calibration analyses (since the lateral displacements induced near the base of the piles were relatively small). As a consequence, the \bar{p}_u data in Fig 9(c) for relatively large depths seem unrealistically low. This is actually of little consequence for the PISA design model, since the provided model is only used within the calibration space, soil failure will not be approached near the pile base in any design calculations. A further aspect of the data relates to the actual physics of the problem being represented by an imperfect (Winkler) model. It is assumed in the current model, for example, that the lateral distributed load depends only on the lateral displacement, but there is likely also a dependency on local rotation. Additionally, the data are normalised with respect to the local soil stiffness and strength; the actual lateral distributed load as determined from the finite element analysis doubtless depends on nonlocal spatial stiffness/strength variations. Moreover, the spatial coupling within the soil is ignored. The influences of these various approximations will likely vary with the dimensions of the

pile and the loading eccentricity. These factors combine to generate the significant scatter observed in the Fig. 9 data.

Linear depth variation functions determined by least-squares fitting to these data are also indicated on Fig. 9. Although more complex depth variation functions could be employed, the overall pile behaviour can be captured remarkably well using just a simple linear fit, as discussed in Burd et al. (2017) and further demonstrated later in this paper. This is in spite of the significant variability in the individual soil reaction curve parameters. Also shown in Fig. 9, for comparison purposes, are the depth variation functions determined using the final GDSM calibration.

Distributed moment curves. An example set of numerical distributed moment soil reaction curves, for pile C4; $D_R = 75\%$, is shown in Fig. 8(b). The response typically tends to a limiting value after a sharp initial rise. At shallow depths a peak is observed in the response. A bi-linear form of the parametric curve ($n_m = 0$) was selected in this case; only two parameters therefore require calibration, as follows:

- (i) A high value of initial stiffness is chosen, arbitrarily, as $k_m = 20$.
- (ii) The ultimate normalised moment, \bar{m}_u , is selected as the mean of the values that satisfy $\bar{m} > 0.9\bar{m}_{final}$ at each soil reaction depth, where \bar{m}_{final} is the value of distributed moment at a given depth at the last computed increment.

Base horizontal load curves. The base horizontal load numerical soil reaction curves extracted from all of the calibration analysis for $D_R = 75\%$ are shown in Fig. 10(a). Soil reaction curve parameters are determined as follows:

- (i) The initial stiffness k_H is selected by proportional least-squares fitting the expression $\bar{H}_B = k_H \bar{v}_H$ to the numerical data for $0 < \bar{H}_B < 0.01$.
- (ii) A displacement $\bar{v}_{H(H-max)}$ is established at which the peak value of \bar{H}_B is first reached. The normalised ultimate response parameter, \bar{H}_{Bu} , is calculated as the average of the normalised base horizontal force values for $\bar{v}_H > \bar{v}_{H(H-max)}$.
- (iii) The ultimate displacement \bar{v}_{Hu} is selected as the first normalised displacement at which the normalised numerical soil reaction is equal to \bar{H}_{Bu} .
- (iv) The curvature parameter, n_H , is determined by minimising the proportional least square error between the numerical data and the conic function.

Base moment curves. The base moment reaction curves extracted from the calibration analyses for $D_R = 75\%$ are shown in Fig. 10(b). Soil reaction curve parameters are determined as follows:

- (i) The initial stiffness k_M , is calculated using proportional least squares regression for $0 < \bar{\psi}_M < 0.05$.
- (ii) A value of ultimate rotation parameter is selected, arbitrarily, at $\bar{\psi}_{Mu} = 50$. This value exceeds the computed normalised rotations and allows reasonable values of the curvature parameter to be selected.
- (iii) The curvature parameter, n_H , and the ultimate response parameter \bar{M}_{Bu} are selected by minimising the proportional least square error between the numerical data and the conic function.

It is seen from the above that threshold values for the distributed lateral load ($\bar{p} < 0.1$), base horizontal force ($\bar{H}_B < 0.01$) and base moment ($\bar{M}_B < 0.05$) were adopted to determine the relevant initial stiffness parameters. These threshold values are essentially arbitrary and were selected for the current work, on the basis of experimentation, to ensure a satisfactory match between the finite element calibrations and the calibrated 1D model, for small displacements.

Second stage optimisation

To improve the fit between the 1D model and the 3D finite element calibration data, adjustments are made to the depth variation function parameters to minimise the cost function, C ,

$$C = \sqrt{\sum_{i=1}^N (1 - \eta_{ult,i})^2} + \sqrt{\sum_{i=1}^N (1 - \eta_{sd,i})^2} \quad (10)$$

where $\eta_{ult,i}$ and $\eta_{sd,i}$ are the ultimate and small displacement accuracy metrics respectively for pile C_i , $i = 1:N$ and the summation is taken over the piles in the calibration set ($N = 11$ for $D_R = 75\%$ and $N = 9$ for the other relative density cases). This process was conducted, separately, for each relative density using optimisation routines implemented in MATLAB.

The parameters from the first stage calibration were used as initial values for this optimisation process. All parameters were allowed to vary by up to $\pm 50\%$ of their initial value, subject to an upper limit of 1.0 on the curvature parameters, and the need for the soil reaction curve parameters to be non-negative at all pile locations.

The form of the depth variation functions developed during this process is indicated in Table 5. These functions require the specification of a total of 22 parameters; parameter values determined for $D_R = 75\%$ at the end of this second stage (Stage 2) are listed in Table 5. Values calculated at the ground surface and at the base of a pile of length $L/D = 2$ and $L/D = 6$, for $D_R = 75\%$, are also tabulated.

Third stage optimisation; relative density functions

The GDSM employs simple functions - linear and constant - to represent the dependency of each depth variation parameter on relative density; these are referred to as 'relative density functions'. If linear functions were to be adopted for all of the (22) model parameters, then a total of 44 relative density parameters would require calibration. It is desirable, therefore, to reduce the calibration space by assigning at least some of the relative density parameters to be constant.

The relative density function forms were chosen in two stages. Initially (Stage 3a) the m , H_B and M_B components were considered. (The relative density functions for the distributed lateral load - the dominant reaction component in terms of overall pile response - were determined in a subsequent process). Depth variation parameters, from Stage 2, for m , H_B and M_B were inspected. Some of the depth variation parameters - e.g. the parameter n_M plotted in Fig 11(a) - indicated a dependency on relative density; linear relative density functions were assigned to these parameters. In other cases - e.g. the parameter k_M plotted in Fig. 11(b) - where no obvious trend was apparent, constant relative density functions were assigned. An initial set of calibrated relative density functions for the m , H_B and M_B components, based on these chosen relative density function forms, were then determined by least squares fitting to the Stage 2 data.

In a subsequent stage (Stage 3b) choices were made on the relative density forms for the distributed lateral load. This was done by re-determining the individual depth variation parameters for the distributed lateral load only, for each reference relative density, by minimising the cost function in Eqn. 10. These computations employed the relative density

functions from Stage 3a to define the model parameters for m , H_B and M_B . It was discovered that this process reduced the scatter in the distributed lateral load depth variation parameters and therefore facilitated the selection of appropriate relative density function forms for this component. Distributed lateral load parameters which, at this stage, exhibited a consistent dependency on relative density (e.g. the parameter n_p , Fig. 11(a) had a linear function of relative density assigned to them. The one parameter that did not exhibit an obvious trend (k_{p2} shown in Fig. 11b) was assigned to be a constant.

The system of relative density functions developed in this way is specified by a set of 39 parameters. A final optimisation (Stage 3c) was conducted over all of these parameters to minimise the cost function in Eqn. 10. The relative density functions employing this final set of GDSM parameters, are specified in Table 6. Note that the fitting process across the relative densities leads to marginal differences between the evaluation of the functions in Table 6 (Stage 3c) and the results shown in Table 5 (Stage 2).

Convergence study

An indicative convergence study has been conducted in which the 1D (GDSM) model (i.e. a form of the 1D model in which the soil reaction curves are determined by the GDSM) is employed with $D_R = 75\%$, for piles C1 and C4, to investigate the sensitivity of the results to the size of the embedded pile and soil elements employed in the model. Calculations were conducted for embedded element lengths of between 0.1m and 10m for C1 ($L = 20m$) and between 0.5m and 20m for C4 ($L = 20m$). Computed values of the lateral loads H_{ult} and H_{sd} at $v_G = D/10$ and $v_G = D/10,000$ respectively, are listed in Table 7; this table also lists errors in the computed lateral load relative to the finest mesh used in each case.

The results indicate that H_{ult} is remarkably tolerant of employing a relatively coarse mesh for both piles. In all cases, even for the coarsest meshes, the error is less than 1%. The small displacement response appears more sensitive to element size, however. In this case, for both piles, embedded element lengths of 5m or less are required to achieve an error of less than 1%.

The process conducted to calibrate the GDSM employed a standard embedded element length of 2.5m. This convergence study suggests that modelling errors associated with mesh discretisation effects in the model calibration process are likely to be negligible.

ANALYSIS OF THE CALIBRATION CASES USING THE GDSM

The $H - v_G$ performance of piles C1 ($D = 10m$, $L = 20m$) and C4 ($D = 10m$, $L = 60m$) computed using the 1D (GDSM) model for $D_R = 75\%$ are shown in Fig. 13. A close fit is obtained between the 1D model and the calibration data. The numerical soil reaction curves, together with the parametric curves determined using the GDSM, for the distributed lateral load, are plotted in Fig.14(a) (for the full range of displacements) and in Fig. 14(b) (for small displacements). It is clear that differences exist between the two sets of data. Although the GDSM soil reaction curves are tailored to provide a representation of the 3D finite element data across the complete set of calibration analyses, they can exhibit a tendency, apparent in Fig. 14, to depart from the 3D calibration data for individual piles at a local level. Experience from the use of the 1D model indicates, however, that it is able to reproduce the overall behaviour of the calibration piles to a high accuracy, although at a local level, significant differences can exist between the calibration data and the parametric soil reaction curves.

Table 8 provides the performance metrics for the application of the GDSM to the full range of calibration piles, showing an excellent fit of the model to the data.

DESIGN EXAMPLES

To demonstrate the predictive capability of the 1D (GDSM) model, various design examples have been considered. The geometries of these example cases, specified in Table 9, are selected to fall within the calibration space but to differ from the geometric conditions employed for the calibration piles. Values of relative density have been chosen that fall within the calibration space but not at the original calibration densities.

The load-displacement responses computed for pile D2t using the 1D (GDSM) model and, separately, with corresponding 3D finite element models, are shown in Fig. 15, for relative densities 55% and 85%. A close match is observed between the two data sets. Fig. 15 also shows excellent agreement of the bending moments induced in the embedded portions of the piles, determined for $H = H_{ult}$ (where H_{ult} is the lateral load determined from the 3D finite element analysis at $v_G = 0.1D$) and also for $H = 0.5H_{ult}$.

Values of accuracy and ratio metrics for a set of 13 design example cases are listed in Table 10. These data, which indicate a close match between the 1D (GDSM) model and corresponding 3D finite element results, support the assumption implicit in the PISA methodology, that the 1D model provides an efficient means of interpolating the overall pile response computed using the 3D calibration calculations to other pile geometries and relative densities within the calibration space.

DISCUSSION AND CONCLUDING REMARKS

The PISA design model provides a rapid means of conducting design calculations for monopile foundations for offshore wind turbines. This paper demonstrates an application of the model to homogeneous marine sand sites, complementing the modelling approach described in Byrne et al. (2019b) for glacial clay till soils. The model is capable of delivering predictions of performance that closely match the results obtained from equivalent 3D finite element models.

The paper describes a calibration process based on the soil conditions at the PISA sand site in Dunkirk. This calibration is considered to provide a realistic model for monopiles installed at offshore sand sites where the characteristics of the sand are similar to the Flandrian sand encountered at Dunkirk and where the monopile dimensions fall within the calibration space. In other cases, application of the model may require a separate calibration exercise. The model has been demonstrated for monopiles with uniform wall thickness. However, the model can be applied straightforwardly, to piles with variations in wall thickness along their embedded length, by the specification of appropriate structural properties for the beam elements in the 1D model. The normalisations employed in the model do not explicitly include the load eccentricity, h , although the optimised calibration parameters will likely depend on the range of h/D employed in the calibration process. It therefore follows that the model should not be used for values of h/D (or indeed any other pile parameters) that fall outside of the calibration space.

The PISA design model is shown to reproduce the overall behaviour of the calibration piles, even though at a local level significant differences can exist between the numerical soil reaction curves and the calibrated model. This apparently well-conditioned aspect of the

model is considered to be due to the overall pile performance being obtained by integrating the soil reaction curves along the entire length of the foundation. Provided that significant systematic errors are absent, this averaging process appears to have the consequence that the model is remarkably tolerant of imperfect fitting of the data at a local level.

The approximate nature of the Winkler modelling approach adopted in the PISA design model has a number of implications. Firstly, as is indicated by the considerable scatter in the data in Figure 9, the model is unable to represent the pile-soil interaction at all points along the pile in a high fidelity manner. The Stage 1 calibration process is modestly successful at representing the overall monopile performance, but the performance of the model was found to be enhanced by the use of a further optimisation process Stage 2. Although the Stage 2 process (and to an extent the Stage 3 process) improves the overall performance of the model, it does not necessarily lead to an improved representation of the actual physics of the local soil-pile interaction. Instead, the Stage 2 and Stage 3 optimisation should be understood as a pragmatic expedient to calibrate an imperfect model (Winkler) to provide high fidelity predictions of behaviour within a predefined calibration space. It is also necessary to recognise that any modelling errors inherent in the 3D finite element calibration analyses will be inherited by the design model.

The current form of the PISA design model is restricted to monotonic loading. Extensions to cyclic loading are feasible e.g. by the development of cycle-by-cycle soil reaction curves, or the implementation of approaches in which the (monotonic) soil reaction curves are modified to reflect the influence of previous load cycling. The model is demonstrated for homogeneous soil deposits only, whereas offshore sites usually consist of layered profiles, often involving interbedded clays and sands. This can be addressed using the PISA design model by assigning clay soil reaction curves (Byrne et al. 2019b) to the clay layers and employing the current model for the sand layers; Byrne et al. (2019a) describes an initial evaluation of this approach.

ACKNOWLEDGEMENTS

The PISA Phase 1 project was funded by the UK Department for Energy and Climate Change (DECC) and the PISA Industry Partners under the umbrella of the Offshore Wind Accelerator (OWA) programme, which was designed and is led by the Carbon Trust. The Authors acknowledge the provision of financial and technical support by the following project partners: Ørsted Wind Power (formerly: DONG Energy), Alstom Wind, E.ON, EDF, Equinor (formerly: Statoil), innogy, SPR, SSE, Vattenfall and Van Oord. Development of the specific GDSM aspects of the PISA design model were conducted as part of the PISA Phase 2 project, which was supported by the Scottish Government and all partners from the PISA project except Statkraft.

APPENDIX A: IMPLEMENTATION DETAILS FOR THE SAND MODELLING

FRAMEWORK

The dependence of distributed moment on the distributed lateral soil reaction in the sand modelling framework requires some special consideration for the numerical implementation of the PISA design model. The finite element formulation adopted for the model employs soil finite elements that have compatible displacements with the finite elements used to model the pile (see Byrne et al. (2019b) for further details). A soil finite element of length L_e connected to nodes 1 and 2 with depth coordinates Z_1 and Z_2 respectively is illustrated in Fig. A1.

Figure A1: Illustration of a soil finite element within the PISA design model implementation

The lateral displacement within this soil element is defined by the interpolation,

$$v = N_1 V_1 - N_2 \Psi_1 + (N_2 + N_4) \gamma_0 + N_3 V_2 - N_4 \Psi_2 \quad (\text{A1})$$

where V_1, V_2 are the values of lateral displacement and Ψ_1, Ψ_2 are the pile cross-section rotation at nodes 1 and 2 respectively. The functions N_i are the conventional set of Hermite cubic interpolation polynomials, given by,

$$N_1 = 1 - 3\alpha^2 + 2\alpha^3 \quad (\text{A2})$$

$$N_2 = \alpha L_e (1 - 2\alpha + \alpha^2)$$

$$N_3 = 3\alpha^2 - 2\alpha^3$$

$$N_4 = \alpha L_e (-\alpha + \alpha^2)$$

where $\alpha = (z - Z_1)/L_e$ and z is a general depth coordinate of a point within the element. The shear strain, γ_0 , is assumed constant within each beam element; since the soil and beam elements share the same interpolation, the shear strain γ_0 in the beam elements also appears as a degree of freedom for the soil elements in Equation A1. The local displacement v and rotation ψ within in each soil element is given by,

$$\mathbf{v} = \mathbf{B} \mathbf{U} \quad (\text{A2})$$

where $\mathbf{v} = (v \ \psi)^T$ is the local displacement/rotation vector, $\mathbf{U} = (V_1 \ \Psi_1 \ \gamma_0 \ V_2 \ \Psi_2)^T$ is a vector containing the element displacement degrees of freedom and,

$$\mathbf{B} = \begin{bmatrix} N_1 & -N_2 & (N_2 + N_4) & N_3 & -N_4 \\ -N_1' & N_2' & -(N_2' + N_4' - 1) & -N_3' & N_4' \end{bmatrix} \quad (\text{A3})$$

where N_i' denotes a shape function derivative with respect to z . The stiffness matrix \mathbf{k} for the soil elements is determined from,

$$\mathbf{k} = \int_{Z_1}^{Z_2} \mathbf{B}^T \mathbf{D} \mathbf{B} \, dz \quad (\text{A4})$$

where \mathbf{D} is an appropriate constitutive matrix.. The tangent constitutive matrix, \mathbf{D}_t , for the soil element is,

$$\mathbf{D}_t = \frac{\partial \mathbf{p}}{\partial \mathbf{v}} = \begin{bmatrix} \frac{dp}{dv} & \frac{dp}{d\psi} \\ \frac{dm}{dv} & \frac{dm}{d\psi} \end{bmatrix} \quad (\text{A5})$$

where $\mathbf{p} = (p \ m)^T$ is the local distributed load/moment vector. The terms in the first row of \mathbf{D}_t are determined from the normalised soil reaction curve for \bar{p} straightforwardly as,

$$\frac{dp}{dv} = G \frac{d\bar{p}}{d\bar{v}}; \quad \frac{dp}{d\psi} = 0 \quad (\text{A6})$$

As a consequence of the normalisation adopted for the distributed moment (see Eqn. 2), the second row of \mathbf{D}_t matrix contains two non-zero terms which are evaluated as,

$$\frac{dm}{dv} = \frac{mG}{p} \frac{d\bar{p}}{d\bar{v}}; \quad \frac{dm}{d\psi} = \frac{pDG}{\sigma_{vi}} \frac{d\bar{m}}{d\bar{\psi}} \quad (\text{A7})$$

The off-diagonal term, dm/dv , is undefined in the initial state, at which $p = 0$; it would also become undefined at later stages in the analysis if p approaches zero (e.g. near to the pile centre of rotation). To avoid potential numerical difficulties, the constitutive matrix \mathbf{D} employed to evaluate the element stiffness matrix in Eqn. A5 consists of only the two diagonal terms; the off-diagonal terms are set to zero. The assembled global stiffness matrix therefore does not strictly represent the tangent stiffness; the solution process employed in the numerical implementation of the model is therefore classified as quasi Newton-Raphson (in contrast to the full Newton-Raphson procedure adopted in the PISA model for clay described

in Byrne et al. 2019b). To compute the internal forces, however, the full, coupled, representation of the distributed moment, Eqn. 6, is employed. Experience with this quasi Newton-Raphson procedure indicates that it has excellent stability and convergence characteristics.

NOTATION

D	Pile diameter
D_R	Soil relative density
e_0	Initial soil void ratio
GDSM	General Dunkirk Sand Model
G_0	Small strain soil shear modulus
H	Lateral load applied to pile
H_{1D}	Lateral load applied to pile, computed with the 1D model
H_{3D}	Lateral load applied to pile, computed with the 3D model
H_G	Lateral load applied to pile at ground level
H_{sd}	Lateral load applied to pile at a ground-level displacement of $v_G = D/10,000$
H_{ult}	Lateral load applied to pile at a ground-level displacement of $v_G = D/10$
H_B	Horizontal force at pile base
h	Load eccentricity
k	Initial stiffness of parametric soil reaction curve
L	Pile embedded length
M_B	Moment at pile base
M_G	Moment applied to pile at ground level
m	Distributed moment acting on monopile
n	Curvature parameter for parametric soil reaction curve
p	Distributed lateral load applied to pile
s_u	Undrained shear strength of soil
t	Pile wall thickness
v	Lateral pile displacement
v_B	Lateral pile displacement at pile base
v_G	Ground-level lateral pile displacement
\bar{x}_u	Ultimate displacement for parametric soil reaction curve
\bar{y}_u	Ultimate load for parametric soil reaction curve
z	Depth coordinate along the pile
η	Accuracy metric
η_{sd}	Small displacement accuracy metric. (Ground-level pile displacements up to $D/10$ 000)
η_{ult}	Ultimate displacement accuracy metric. (Ground-level pile displacements up to $D/10$)
ρ	Ratio metric
ρ_{sd}	Small displacement ratio metric. (Ground-level pile displacements up to $D/10$ 000)
ρ_{sd}	Ultimate displacement ratio metric. (Ground-level pile displacements up to $D/10$ 000)
σ_{vi}	Initial vertical effective stress in the soil
ψ	Rotation of the pile cross-section
ψ_B	Rotation of the pile cross-section at the pile base

REFERENCES

- Alderlieste E. A., Dijkstra, J. and Van Tol A. F. 2011. Experimental investigation into pile diameter effects of laterally loaded monopiles. In *ASME 2011 30th International Conference on Ocean, Offshore and Arctic Engineering. American Society of Mechanical Engineers*, 985-990.
- API, 2010. *RP 2A-WSD - Recommended Practice for Planning, Designing and Constructing Fixed Offshore Platforms*. Washington: American Petroleum Institute.
- Astley, R.J. 1992. *Finite Elements in Solids and Structures: An Introduction*. Chapman Hall.
- Burd, H.J., Beuckelaers, W.J.A.P., Byrne, B.W., Gavin, K., Houlsby, G.T., Igoe, D., Jardine, R.J., Martin, C.M., McAdam, R.A., Muir Wood, A., Potts, D.M., Skov Gretlund, J., Taborada, D.M.G. and Zdravković, L. 2019. New data analysis methods for instrumented medium scale monopile field tests. *Géotechnique*, <https://doi.org/10.1680/jgeot.18.pisa.002>
- Burd, H.J., Byrne, B.W., McAdam, R.A., Houlsby, G.T., Martin, C.M., Beuckelaers W.J.A.P., Zdravković, L., Taborada D.M.G., Potts, D.M., Jardine, R.J., Gavin, K., Doherty, P., Igoe, D., Skov Gretlund, J., Pacheco Andrade, M. and Muir Wood, A. 2017. Design aspects for monopile foundations. *Proc. TC209 workshop on foundation design for offshore wind structures, 19th ICSMGE*, Seoul, 35-44.
- Byrne, B.W, Mcadam, R.A, Burd, H.J, Houlsby, G.T, Martin, C.M, Beuckelaers, W., Zdravković, L., Taborada, D.M.G, Potts, D.M. and Jardine, R. 2017. PISA: new design methods for offshore wind turbine monopiles. *Proc. 8th Int. Conf. on Offshore Site Investigation and Geotechnics*, London: Society for Underwater Technology, Vol. 1, pp 142-161.

Byrne, B.W., Burd, H.J., Zdravković, L., Abadie, C.N., Houlsby, G.T., Jardine, R.J., Martin,

C.M., McAdam, R.A., Pacheco Andrade, M., Pedro, A.M.G., Potts, D.M. and

Taborda, D.M.G. 2019a. PISA design methods for offshore wind turbine monopiles.

Offshore Technology Conference, Houston, Texas.

Byrne, B.W., Houlsby, G.T., Burd, H.J., Gavin, K., Igoe, D., Jardine, R.J., Martin, C.M. ,

McAdam, R.A., Potts, D.M., Taborda, D.M.G. and Zdravković, L. 2019b. PISA

design model for monopiles for offshore wind turbines: Application to a stiff glacial
clay till. *Géotechnique*, in press.

Byrne, B.W., McAdam, R.A., Burd, H.J., Houlsby, G.T., Martin, C.M., Zdravković, L.,

Taborda, D.M.G., Potts, D.M., Jardine, R.J., Sideri, M., Schroeder, F.C., Gavin, K.,

Doherty, P., Igoe, D., Muir Wood, A., Kellahave, D. and Skov Gretlund, J. 2015. New
design methods for large diameter piles under lateral loading for offshore wind
applications. *Proc. 3rd Int. Symp. on Frontiers in Offshore Geotechnics*, Oslo, pp
705-710.

Byrne, B.W., McAdam, R.A., Burd, H.J., Beuckelaers, W.J.A.P., Gavin, K., Houlsby, G.T.,

Igoe, D., Jardine, R.J., Martin, C.M., Muir Wood, A., Potts, D.M., Skov Gretlund, J.,

Taborda, D.M.G. and Zdravković, L. 2019c. Monotonic lateral loaded pile testing in a
stiff glacial clay till at Cowden. *Géotechnique*,

<https://doi.org/10.1680/jgeot.18.pisa.003>

Choo, Y. W. and Kim, D. 2015. Experimental development of the p-y Relationship for large-
diameter offshore monopiles in sands: centrifuge tests. *J. of Geotechnical and*

Geoenvironmental Engineering 142, No. 1, 04015058.

- Chow, F.C. 1997. *Investigations into the behaviour of displacement piles for offshore foundations*. PhD thesis, Imperial College, University of London.
- Cox, W. R., Reese, L. C. and Grubbs, B. R. 1974. Field testing of laterally loaded piles in sand. *Proc., 6th Int. Offshore Technology Conference*, Houston, 459–472.
- DNV-GL, 2016. *DNVGL-ST-0126 – Support structure for wind turbines*. Oslo: Det Norske Veritas.
- Doherty, P. and Gavin, K. 2011. Laterally loaded monopile design for offshore wind farms. *Proceedings of the Institution of Civil Engineers-Energy* 165, No. 1, 7-17.
- Gupta, B.K. and Basu, D. 2018. Applicability of Timoshenko, Euler-Bernoulli and rigid beam theories in analysis of laterally loaded monopiles and piles. *Géotechnique* 68, No. 9, 772-785.
- Hardin, B.O. and Black W.L. 1968. Vibration modulus of normally consolidated clay *Journal of Soil Mechanics and Foundations Div*, 94(SM2), 353-369.
- Hu, Z. B. and Yang, Y. X. 2018. Study on py curves of large-diameter steel pipe piles for offshore wind farm in sand based on in-situ tests. *Journal of Applied Science and Engineering*, 21, No. 2, 171-178.
- Kallehave, D., Byrne, B. W., LeBlanc Thilsted, C. and Mikkelsen, K. K. 2015. Optimization of monopiles for offshore wind turbines. *Phil. Trans. of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 373(2035), 20140100.
- Klinkvort, R., Poder, M., Truong, P. and Zania, V. 2016. Centrifuge modelling of rigid piles in soft clay. *Proc. 3rd European Conference on Physical Modelling in Geotechnics*

Lam, I.P.O. 2013. Diameter effects on p-y curves. *Deep Marine Foundations - A Perspective on the Design and Construction of Deep Marine Foundations*.

Li, W., Zhu, B., and Yang, M. 2017. Static response of monopile to lateral load in overconsolidated dense sand. *J. of Geotechnical and Geoenvironmental Engineering*, 143 No. 7, 04017026

Manzari, M. T., and Dafalias, Y. F. 1997. A critical state two-surface plasticity model for sands. *Géotechnique*, 47, No. 2, 255-272.

Matlock, H. 1970. Correlations for design of laterally loaded piles in soft clay, Paper No. OTC 1204, Proc. 2nd Annual Offshore Technology Conference, Houston, Texas, 1, 577-594.

McAdam, R.A., Byrne, B.W., Houlsby, G.T., Beuckelaers, W.J.A.P., Burd, H.J., Gavin, K., Igoe, D., Jardine, R.J., Martin, C.M., Muir Wood, A., Potts, D.M., Skov Grellund, J., Taborda, D.M.G. and Zdravković, L. 2019. Monotonic lateral loaded pile testing in a dense marine sand at Dunkirk. *Géotechnique*,
<https://doi.org/10.1680/jgeot.18.pisa.004>

Potts, D. M. and Zdravković, L. (1999). *Finite element analysis in geotechnical engineering: theory*. London, Thomas Telford.

Potts, D. M. and Zdravković, L. (2001). *Finite element analysis in geotechnical engineering: application*. London, Thomas Telford.

Reese, L. C., Cox, W. R. and Koop, F. D. (1974). Analysis of later-ally loaded piles in sand, Paper No. OTC 2080, Proc. 5th Annual Offshore Technology Conference, Houston, Texas, 1974, II, 473-485.

Accepted manuscript doi:
10.1680/jgeot.18.p.277

Taborda D.M.G., Zdravković L., Kontoe S. and Potts D.M. 2014. Computational study on the modification of a bounding surface plasticity model for sands. *Computers and Geotechnics* 59. 145-160.

Taborda, D.M.G., Zdravković, L., Potts, D.M., Burd, H.J., Byrne, B.W., Gavin, K., Houlsby, G.T., Jardine, R.J., Liu, T., Martin, C.M. and McAdam, R.A. 2018. Finite element modelling of laterally loaded piles in a dense marine sand at Dunkirk. *Géotechnique*, <https://doi.org/10.1680/jgeot.18.pisa.006>

Zdravković, L., Jardine, R.J., Taborda D.M.G., Abadias, D., Burd, H.J., Byrne, B.W., Gavin, K., Houlsby, G.T., Igoe, D., Liu, T, Martin, C.M., McAdam, R.A., Muir Wood, A., Potts, D.M., Skov Gretlund, J. and Ushev, E. 2019a. Ground characterisation for PISA pile testing and analysis. *Géotechnique*, <https://doi.org/10.1680/jgeot.18.pisa.001>

Zdravković, L., Taborda, D.M.G., Potts, D.M., Abadias, D., Burd, H.J., Byrne, B.W., Gavin, K., Houlsby, G.T., Jardine, R.J., Martin, C.M., McAdam, R.A. and Ushev, E. 2019b. Finite element modelling of laterally loaded piles in a stiff glacial clay till at Cowden. *Géotechnique*, <https://doi.org/10.1680/jgeot.18.pisa.005>

Table 1: Dimensionless forms for the soil reaction curves

Normalised variable	Dimensionless form
Distributed lateral load, \bar{p}	$\frac{p}{\sigma'_{vi}D}$
Lateral displacement, \bar{v}	$\frac{vG_0}{D\sigma'_{vi}}$
Distributed moment, \bar{m}	$\frac{m}{pD}$
Pile cross-section rotation, $\bar{\psi}$	$\frac{\psi G_0}{\sigma'_{vi}}$
Base horizontal load, \bar{H}_B	$\frac{H_B}{\sigma'_{vi}D^2}$
Base moment, \bar{M}_B	$\frac{M_B}{\sigma'_{vi}D^3}$

Table 2: Initial values of void ratio, e_0 , and relative density for the representative offshore sites

Relative density, D_R [%]	Initial void ratio, e_0
45	0.741
60	0.685
75	0.628
90	0.573

Table 3: Constitutive parameters for the sand constitutive model (Taborda et al. 2014) employed in the 3D finite element calibration analyses. These parameters are identical to those that were determined, as described in Taborda et al. (2019), to conduct 3D finite element analysis of the PISA test piles at Dunkirk.

Component	Parameters
Critical State Line	$p'_{ref} = 101.3 \text{ kPa}$; $e_{CS,ref} = 0.910$; $\lambda = 0.135$; $\xi = 0.179$
Strength	$M_c^c = 1.28$; $M_e^c = 0.92$
Model surfaces	$k_c^b = 2.70$; $k_c^d = 0.88$; $m = 0.065$; $p'_{YS} = 1.0 \text{ kPa}$; $A_0 = 1.30$
Hardening modulus	$h_0 = 0.4$; $\alpha = 1.0$; $\gamma = 0.0$; $\beta = 0.0$; $\mu = 1.0$
Nonlinear elasticity – small strain stiffness	$B = 875.0$; $\nu = 0.17$
Nonlinear elasticity – shear stiffness degradation	$\alpha_1 = 0.40$; $\gamma_1 = 1.031 \times 10^{-3}$; $\kappa = 2.0$
Fabric tensor	$H_0 = 0.0$; $\zeta = 0.0$

Table 4: Pile geometry and loading eccentricities employed in the 3D finite element

calibration analyses

Pile reference	<i>D</i> (m)	<i>h</i> (m)	<i>h/D</i>	<i>L</i> (m)	<i>L/D</i>	<i>t</i> (mm)	<i>D/t</i>
C1	10	50	5	20	2	91	110
C2	10	150	15	20	2	91	110
C3	10	50	5	20	2	125	80
C4	10	50	5	60	6	91	110
C5	10	150	15	60	6	91	110
C6	5	25	5	10	2	45	110
C7	5	25	5	10	2	83	60
C8	5	25	5	30	6	45	110
C9	5	75	15	30	6	45	110
C10	7.5	37.5	5	15	2	68	110
C11	7.5	37.5	5	45	6	68	110

Table 5: General forms of depth variation functions employed in the sand modelling framework. Depth variation parameters for $D_R = 75\%$ determined from the Stage 2 optimisation, with values for selected cases also listed.

Soil reaction component	Soil reaction parameter	Depth variation functions	Depth variation parameters for $D_R = 75\%$	Value at surface	Value at base of $L/D = 2$ pile	Value at base of $L/D = 6$ pile
Distributed lateral load, \mathbf{p}	Ultimate displacement, \bar{v}_{pu}	\bar{v}_{pu}	$\bar{v}_{pu} = 64.78$	64.78	64.78	64.78
	Initial stiffness, k_p	$k_{p1} + k_{p2} \frac{z}{D}$	$k_p = 8.64 - 0.81 \frac{z}{D}$	8.64	7.02	3.78
	Curvature, n_p	n_p	$n_p = 0.966$	0.966	0.966	0.966
	Ultimate reaction, \bar{p}_u	$\bar{p}_{u1} + \bar{p}_{u2} \frac{z}{L}$	$\bar{p}_u = 20.86 - 5.83 \frac{z}{L}$	20.86	15.03	15.03
Distributed moment, \mathbf{m}	Ultimate rotation, $\bar{\psi}_{mu}$	$\bar{\psi}_{mu}$	n/a	n/a	n/a	n/a
	Initial stiffness, k_m	k_m	$k_m = 18.1$	18.1	18.1	18.1
	Curvature, n_m	n_m	$n_m = 0.0$	0.0	0.0	0.0
	Ultimate moment, \bar{m}_u	$\bar{m}_{u1} + \bar{m}_{u2} \frac{z}{L}$	$\bar{m}_u = 0.23 - 0.05 \frac{z}{L}$	0.23	0.18	0.18
Base horizontal force, \mathbf{H}_B	Ultimate displacement, \bar{v}_{Hu}	$\bar{v}_{Hu1} + \bar{v}_{Hu2} \frac{L}{D}$	$\bar{v}_{Hu} = 2.13 - 0.31 \frac{L}{D}$	n/a	1.51	0.27
	Initial stiffness, k_H	$k_{H1} + k_{H2} \frac{L}{D}$	$k_H = 3.28 - 0.37 \frac{L}{D}$	n/a	2.54	1.06
	Curvature, n_H	$n_{H1} + n_{H2} \frac{L}{D}$	$n_H = 0.83 - 0.058 \frac{L}{D}$	n/a	0.714	0.482
	Ultimate reaction, \bar{H}_{Bu}	$\bar{H}_{Bu1} + \bar{H}_{Bu2} \frac{L}{D}$	$\bar{H}_{Bu} = 0.63 - 0.07 \frac{L}{D}$	n/a	0.49	0.21

Base moment, M_B	Ultimate rotation, $\bar{\psi}_{Mu}$	$\bar{\psi}_{Mu}$	$\bar{\psi}_{Mu} = 49.4$	n/a	49.4	49.4
	Initial stiffness, k_M	k_M	$k_M = 0.30$	n/a	0.30	0.30
	Curvature, n_M	n_M	$n_M = 0.86$	n/a	0.86	0.86
	Ultimate reaction, \bar{M}_{Bu}	\bar{M}_{Bu1} $+ \bar{M}_{Bu2} \frac{L}{D}$	\bar{M}_{Bu} $= 0.39 - 0.05 \frac{L}{D}$	n/a	0.29	0.09

Table 6: Relative density functions for the GDSM, calibrated for $2 \leq L/D \leq 6$; $5 \leq h/D \leq 15$; $45\% \leq D_R \leq 90\%$). In these relative density functions, the value of D_R is expressed as a decimal (i.e. $D_R = 0.75$ for sand with 75% relative density). The relative density functions relate to the depth variation function forms specified in Table 5. The relative density functions are specified in the table to a precision of four significant figures; parameters with this precision were adopted in the 1D model computations described in the current paper. This relatively precise form of the data, selected to be suitable for numerical computations, should not be interpreted as being indicative of the perceived accuracy of these expressions. For a general consideration of the trends and characteristics of the soil reaction curves, employing the data at a lower level of precision (e.g. two significant figures) might be more appropriate.

Soil reaction component	Soil reaction parameter	Relative density functions
Distributed lateral load, p	Ultimate displacement, \bar{v}_{pu}	$\bar{v}_{pu} = 146.1 - 92.11D_R$
	Initial stiffness, k_p	$k_{p1} = 8.731 - 0.6982D_R$
		$k_{p2} = -0.9178$
	Curvature, n_p	$n_p = 0.917 + 0.06193D_R$
	Ultimate reaction, \bar{p}_u	$\bar{p}_{u1} = 0.3667 + 25.89D_R$
$\bar{p}_{u2} = 0.3375 - 8.900D_R$		
Distributed moment, m	Ultimate rotation, $\bar{\psi}_{mu}$	Given by \bar{m}_u/k_m
	Initial stiffness, k_m	$k_m = 17.00$
	Curvature, n_m	$n_m = 0.0$
	Ultimate moment, \bar{m}_u	$\bar{m}_{u1} = 0.2605$

Soil reaction component	Soil reaction parameter	Relative density functions
Base horizontal force, H_B	Ultimate displacement, \bar{v}_{Hu}	$\bar{m}_{u2} = -0.1989 + 0.2019D_R$
		$\bar{v}_{Hu1} = 0.5150 + 2.883D_R$
	Initial stiffness, k_H	$\bar{v}_{Hu2} = 0.1695 - 0.7018D_R$
		$k_{H1} = 6.505 - 2.985D_R$
	Curvature, n_H	$k_{H2} = -0.007969 - 0.4299D_R$
		$n_{H1} = 0.09978 + 0.7974D_R$
	Ultimate reaction, \bar{H}_{Bu}	$n_{H2} = 0.004994 - 0.07005D_R$
		$\bar{H}_{Bu1} = 0.09952 + 0.7996D_R$
Base moment, M_B	Ultimate rotation, $\bar{\psi}_{Mu}$	$\bar{H}_{Bu2} = 0.03988 - 0.1606D_R$
		$\bar{\psi}_{Mu} = 44.89$
	Initial stiffness, k_M	$k_M = 0.3515$
		Curvature, n_M
Ultimate reaction, \bar{M}_{Bu}	$\bar{M}_{Bu1} = 0.09981 + 0.3710D_R$	
	$\bar{M}_{Bu2} = 0.01998 - 0.09041D_R$	

Table 7: Convergence study results for piles C1 and C4; $D_R = 75\%$

Number of embedded elements	Embedded element size (m)	H_{ult} (MN)	Error _{ult} (%)	H_{sd} (MN)	Error _{sd} (%)
C1					
200	0.1	25.5571	0.0000	0.5379	0.0000
40	0.5	25.5567	-0.0015	0.5379	0.0046
20	1	25.5552	-0.0074	0.5379	0.0011
10	2	25.5590	0.0073	0.5382	0.0506
4	5	25.6334	0.2984	0.5400	0.3927
2	10	25.6265	0.2713	0.5488	2.0193
C4					
120	0.5	174.3909	0.0000	0.7549	0.0000
60	1	174.3935	0.0015	0.7549	-0.0024
24	2.5	174.4122	0.0122	0.7552	0.0404
12	5	174.4655	0.0428	0.7571	0.2930
6	10	174.7566	0.2097	0.7666	1.5515
4	15	174.8799	0.2804	0.7877	4.3519
3	20	175.3447	0.5470	0.8156	8.0427

Table 8: Accuracy and ratio metrics determined for the 1D (GDSM) model for all calibration piles

Relative density	Pile reference	ρ_{sd}	ρ_{ult}	η_{sd}	η_{ult}	
$D_R = 45\%$	C1	0.96	1.09	0.96	0.93	
	C2	0.93	1.09	0.93	0.93	
	C4	1.03	1.04	0.97	0.95	
	C5	0.99	1.03	0.99	0.96	
	C6	1.02	0.98	0.98	0.98	
	C8	1.09	1.00	0.91	0.98	
	C9	1.05	0.99	0.94	0.99	
	C10	0.98	1.05	0.98	0.96	
	C11	1.05	1.03	0.95	0.96	
	$D_R = 60\%$	C1	0.94	1.08	0.95	0.96
		C2	0.92	1.07	0.92	0.96
C4		1.01	1.03	0.99	0.97	
C5		0.98	1.02	0.98	0.98	
C6		1.00	0.93	0.99	0.91	
C8		1.07	0.98	0.92	0.99	
C9		1.04	0.96	0.95	0.98	
C10		0.96	1.02	0.97	0.98	
C11		1.04	1.01	0.96	0.98	
$D_R = 75\%$		C1	0.93	1.02	0.94	0.97
		C2	0.91	1.02	0.91	0.96
	C3	0.94	1.02	0.95	0.96	
	C4	1.00	1.00	1.00	0.99	
	C5	0.97	0.99	0.97	0.99	
	C6	0.99	0.92	0.99	0.90	
	C7	1.00	0.89	0.98	0.88	
	C8	1.07	0.95	0.92	0.98	
	C9	1.03	0.94	0.96	0.97	
	C10	0.95	0.98	0.96	0.94	
	C11	1.03	0.98	0.97	0.99	
$D_R = 90\%$	C1	0.91	1.04	0.92	0.98	
	C2	0.89	1.04	0.89	0.99	
	C4	0.99	1.02	0.99	0.95	
	C5	0.95	1.01	0.95	0.97	
	C6	0.97	0.94	0.98	0.95	

	C8	1.05	1.00	0.94	0.97
	C9	1.02	0.99	0.97	0.98
	C10	0.93	1.00	0.95	0.99
	C11	1.01	1.01	0.98	0.96
Average		0.99	1.00	0.96	0.96
CoV		5.14%	4.52%		

Table 9: Pile geometries and loading eccentricity for the design example piles

Pile reference	D (m)	h (m)	h/D	L (m)	h/L	L/D	t (mm)	D/t
D1	7.5	37.5	5	22.5	1.67	3	68	110
D2	8.75	87.5	10	35	2.5	4	91	96
D2t	8.75	87.5	10	35	2.5	4	150	58

Table 10: Accuracy and ratio metrics determined for the design examples

Relative density	Pile reference	ρ_{sd}	ρ_{ult}	η_{sd}	η_{ult}
$D_R = 45\%$	D1	0.97	1.04	0.97	0.96
	D2	1.03	1.06	0.97	0.94
	D2t	1.07	1.06	0.93	0.94
$D_R = 60\%$	D1	0.95	0.99	0.96	0.99
	D2	1.02	1.01	0.98	0.98
$D_R = 75\%$	D1	1.03	0.93	0.96	0.95
	D2	1.01	0.96	0.99	0.98
$D_R = 90\%$	D1	0.92	0.96	0.93	0.97
	D2	0.99	1.00	0.99	0.96
	D2t	1.02	0.99	0.98	0.96
$D_R = 55\%$	D2t	1.05	1.04	0.94	0.96
$D_R = 70\%$	D2t	1.04	0.97	0.95	0.98
$D_R = 85\%$	D2t	1.02	0.97	0.97	0.98
Average		1.01	1.00	0.96	0.97
CoV		4.13%	4.15%		

Figure captions

Figure 1: Geometry for the monopile design problem. The monopile consists of a circular tube with outer diameter D , wall thickness t and embedded length L . The height h of the load application is referred to as load eccentricity.

Figure 2: PISA design model (a) idealisation of the soil reaction components acting on the pile (b) 1D finite element implementation of the model showing the soil reactions acting on the pile. Note that the reactions are depicted in Figure (a) as acting in the expected direction. In Figure (b) the reactions are shown in directions that are consistent with the coordinate directions shown (p and H_B reacting positive v and v_B ; m and M_B reacting positive (clockwise) ψ and ψ_B)

Figure 3: Conic function adopted for the parametric soil reaction curves

Figure 4: Finite element mesh for pile C4

Figure 5: Performance of the 1D (numerical) model; $D_R = 75\%$, (a) pile C1 ($L/D = 2$) and (b) pile C4 ($L/D = 6$). Additional data are shown for Case P (distributed lateral load terms only in the 1D model) and Case PM (distributed lateral load and distributed moment terms only in the 1D model).

Figure 6: Accuracy and ratio metrics

Figure 7: Calibration and optimisation process for the GDSM

Figure 8: Normalised numerical soil reaction curves extracted from the analysis of pile C4; $D_R = 75\%$, (a) distributed lateral load (b) distributed moment. The data plotted are absolute values. Solid lines indicate numerical soil reaction curves; dashed lines indicate the parametric soil reaction curves determined from the depth variation functions obtained at Stage 1. For pile C4, $L/D = 6$. The plotted data therefore correspond to $z/L = 0.038, 0.18, 0.39, 1.0$

Figure 9: Depth variations of the normalised distributed load soil reaction curve parameters for $D_R = 75\%$. The markers indicate data determined from Stage 1 for all of the calibration piles; also shown are regression lines that are fitted to these data. For

comparison purposes, depth variation functions corresponding to the GDSM are also indicated.

Figure 10: Normalised base horizontal force and base moment for all of the calibration piles for $D_R = 75\%$, with piles of $L/D = 6$ plotted in black and $L/D = 2$ plotted in grey. Solid lines indicate numerical soil reaction curves; dashed lines indicate the parametric soil reaction curves determined from Stage 1.

Figure 11: Example data for the variation of soil reaction curve parameters with relative density. Fig. (a) indicates data on n_M and Fig. (b) indicates data on k_M , both determined at the end of Stage 2. For comparison purposes, the relative density functions corresponding to the GDSM are also indicated.

Figure 12: Example data for the variation of soil reaction curve parameters with relative density. Fig(a) indicates data on n_p and Fig(b) indicates data on k_{p2} both sets determined at Stage 3b. For comparison purposes the relative density functions corresponding to the GDSM are also indicated.

Figure 13: Comparisons between the 3D finite element calibration analyses and the 1D (GDSM) model; $D_R = 75\%$. Figs. (a,b) indicate data for pile C1 ($D = 10$ m, $L = 20$ m); Figs. (c,d) indicate for pile C4 ($D = 10$ m, $L = 60$ m).

Figure 14: Normalised numerical distributed soil reaction curves for pile C4; $D_R = 75\%$ (shown as solid lines) compared with soil reaction curves determined from the GDSM (shown as dashed lines)

Figure 15: Comparison between computed responses determined from the 1D (GDSM) model and equivalent 3D finite element analyses for pile D2t for $D_R = 55\%$ (Row 1) and $D_R = 85\%$ (Row 2)

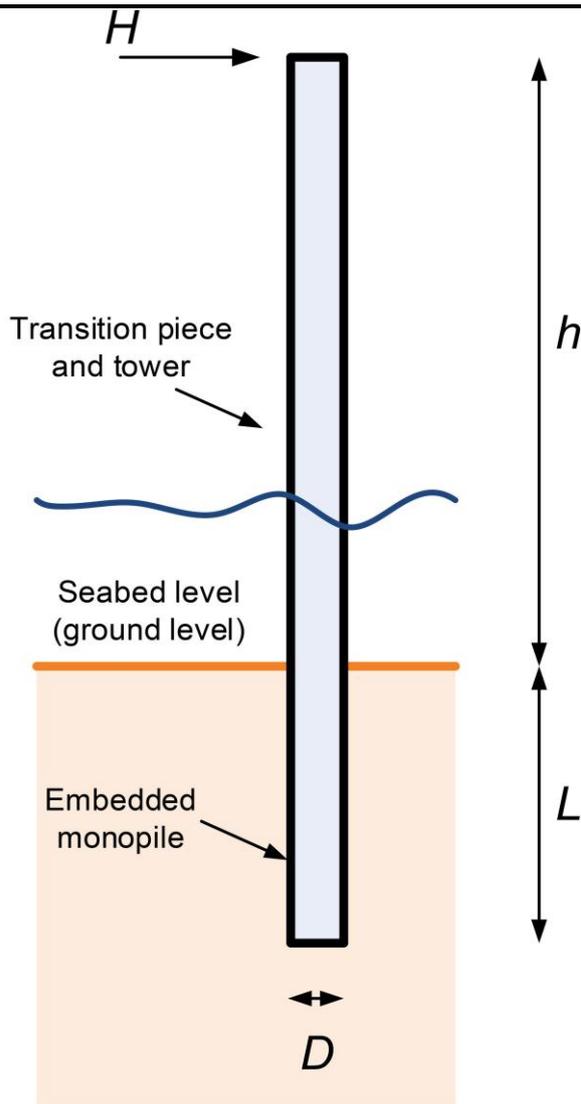


Figure 1

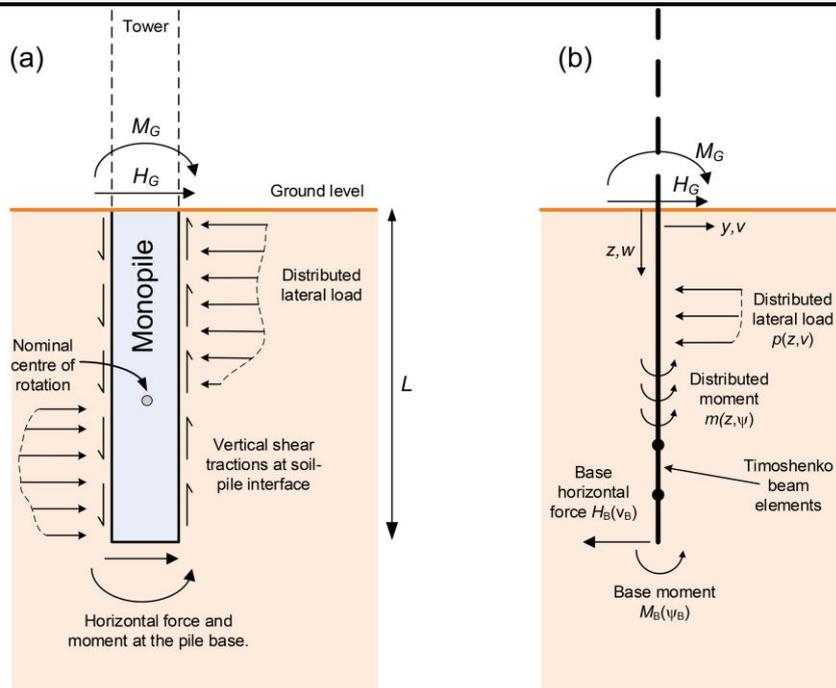


Figure 2

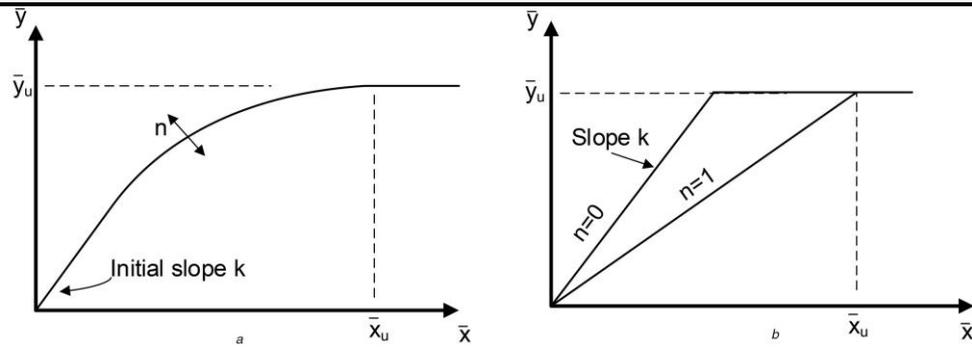


Figure 3

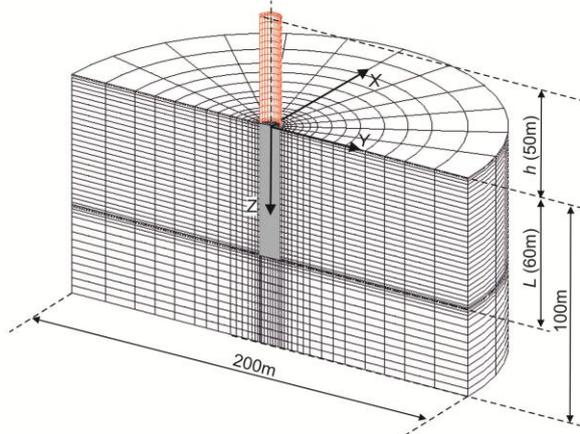


Figure 4

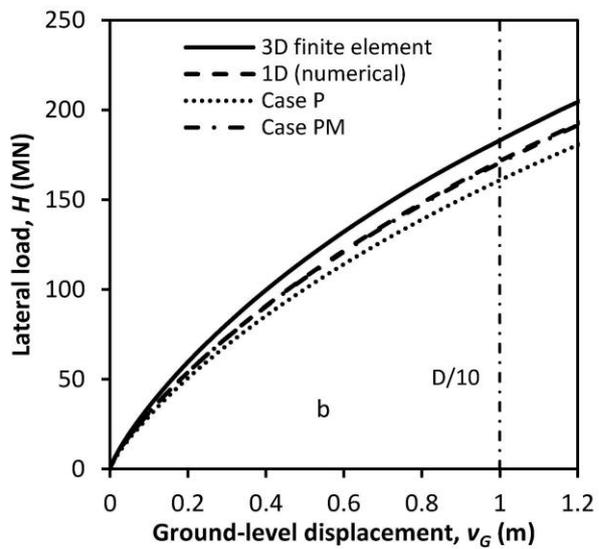
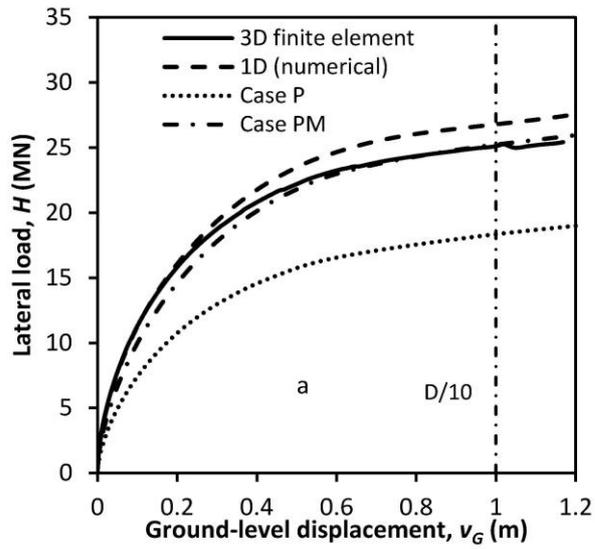


Figure 5

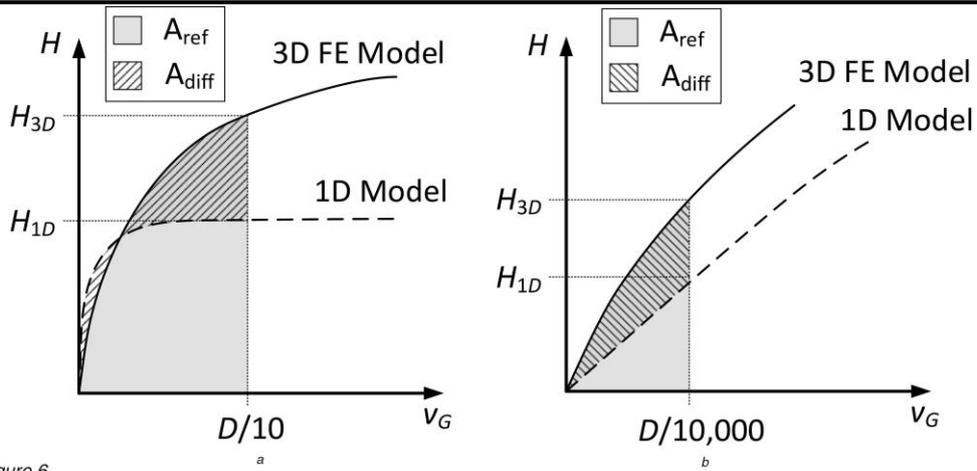


Figure 6

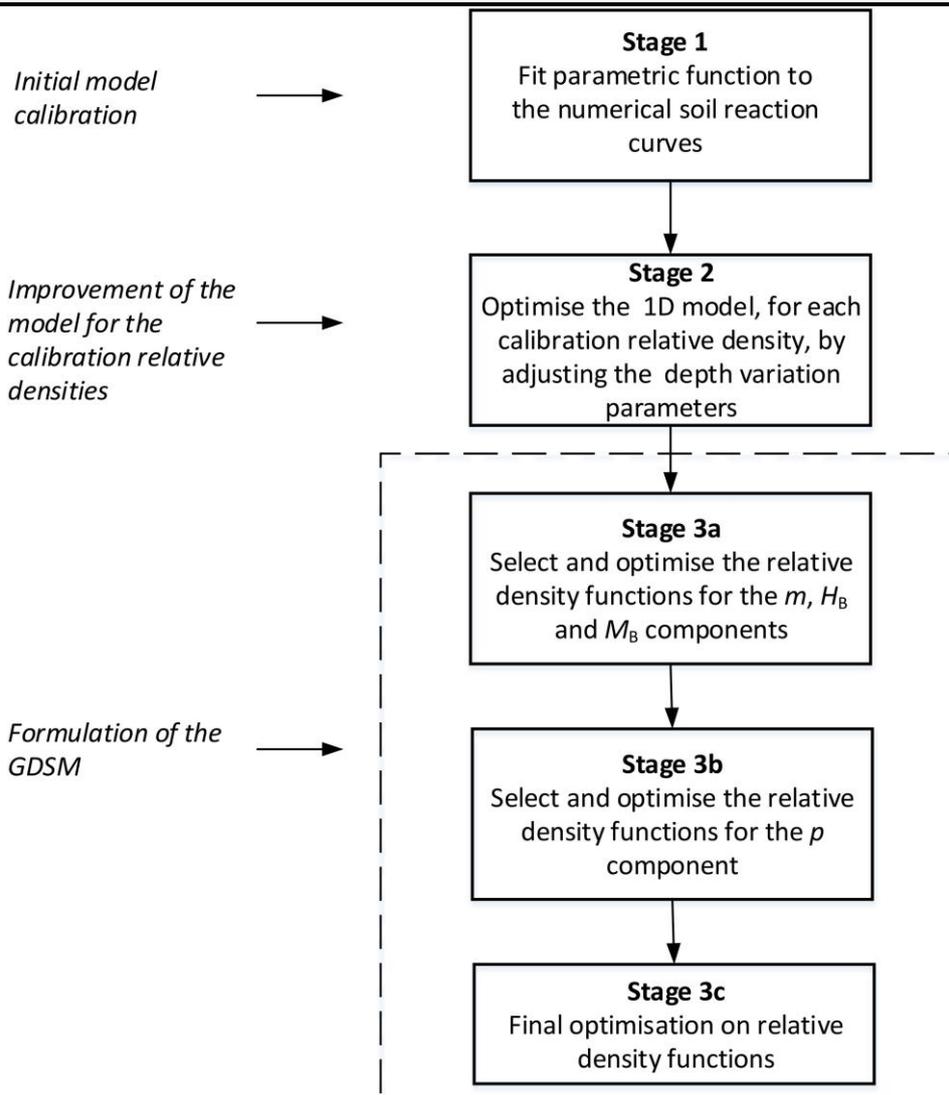


Figure 7

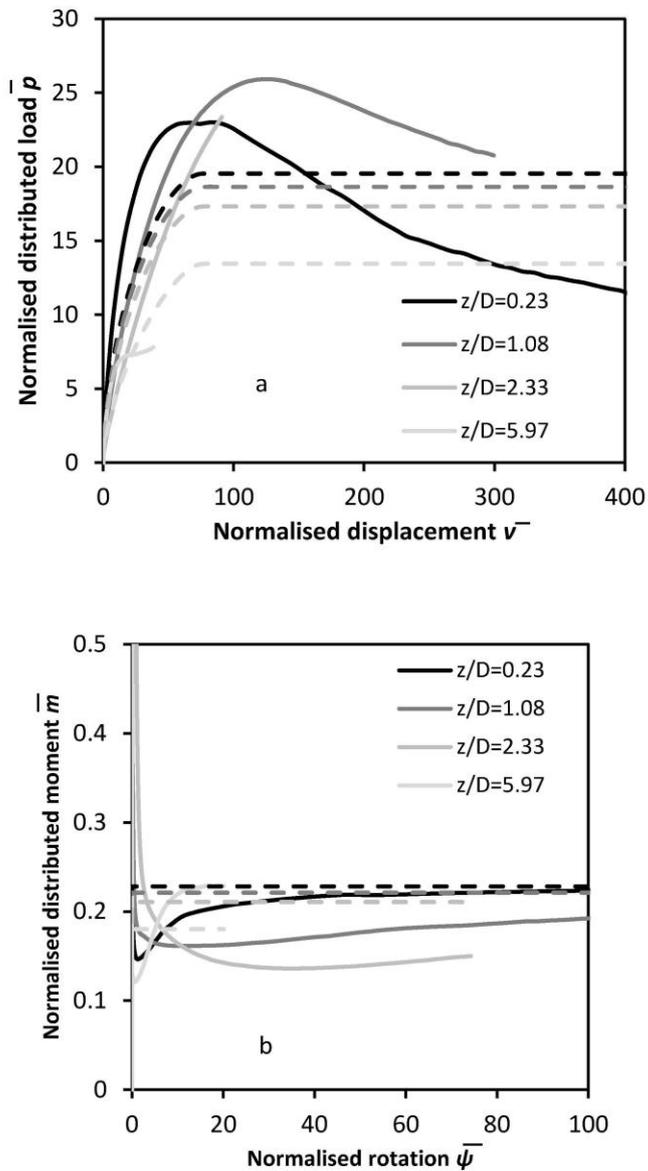


Figure 8

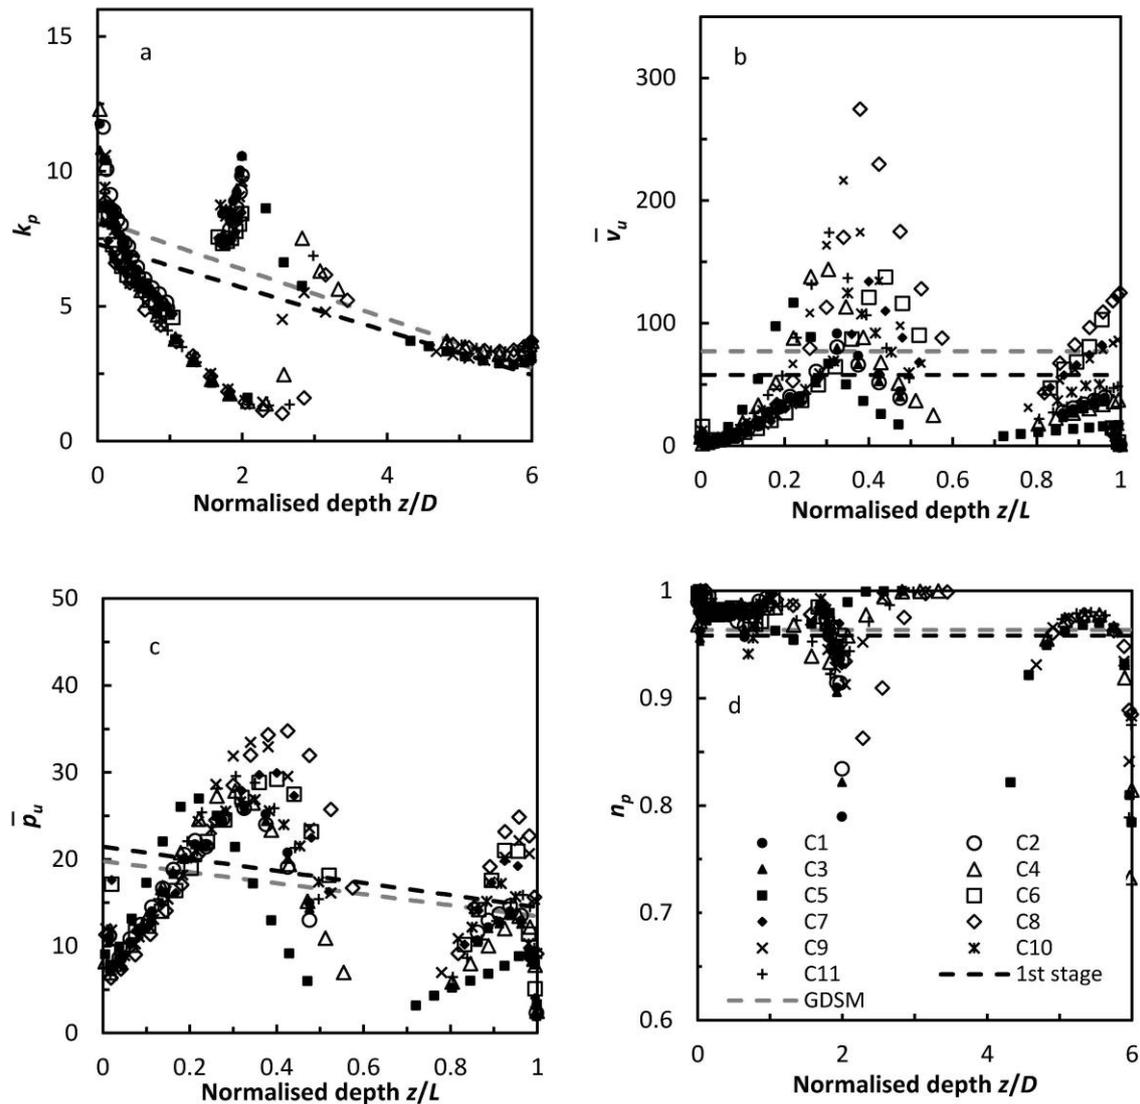


Figure 9

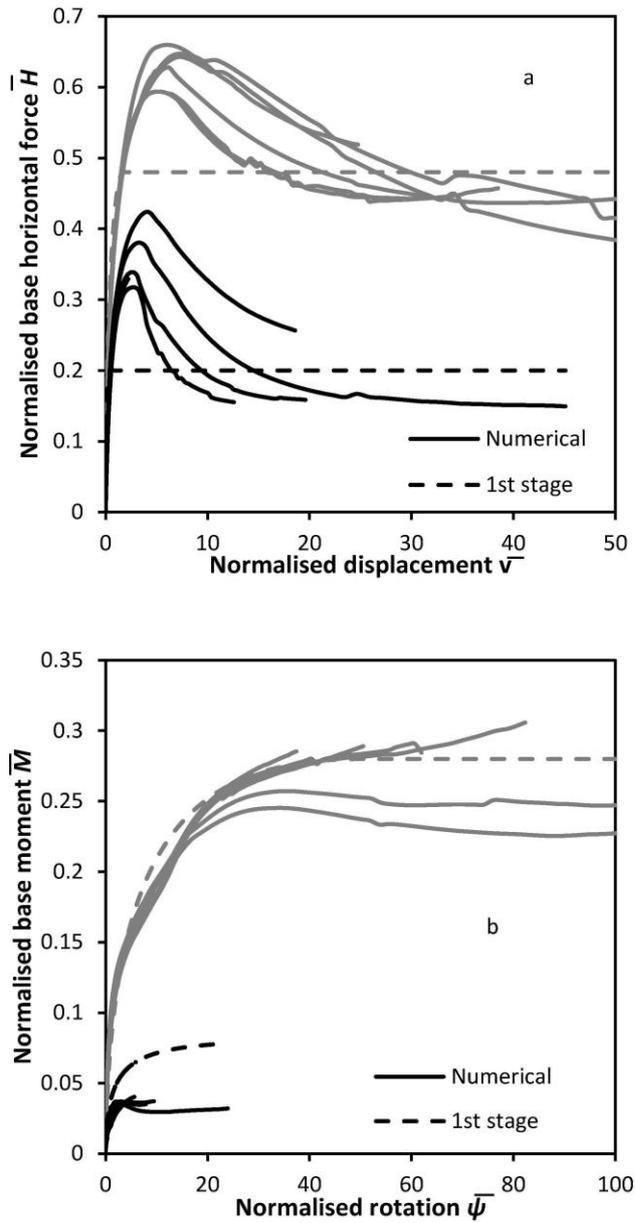


Figure 10

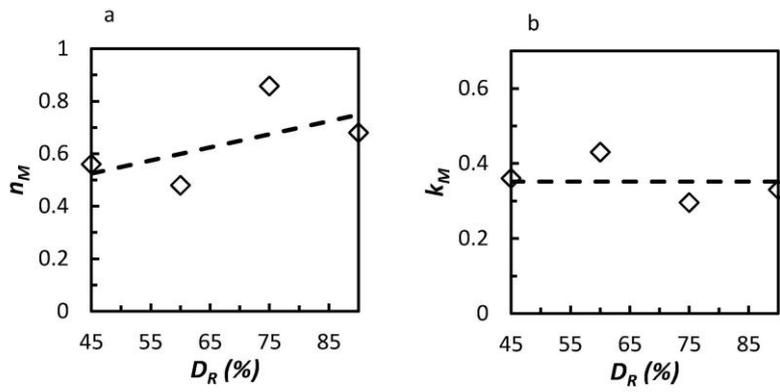


Figure 11

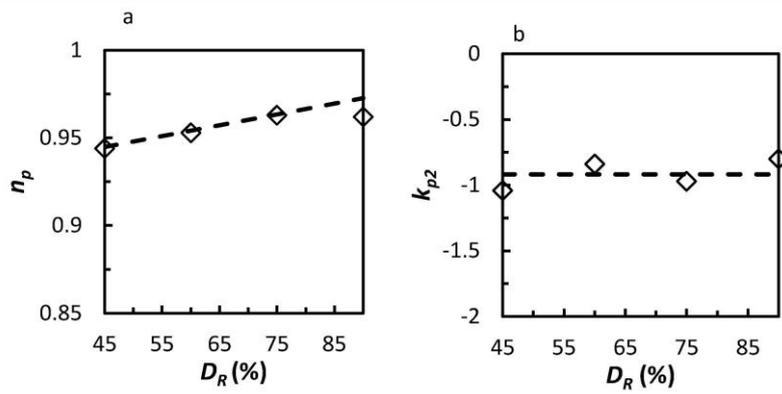


Figure 12

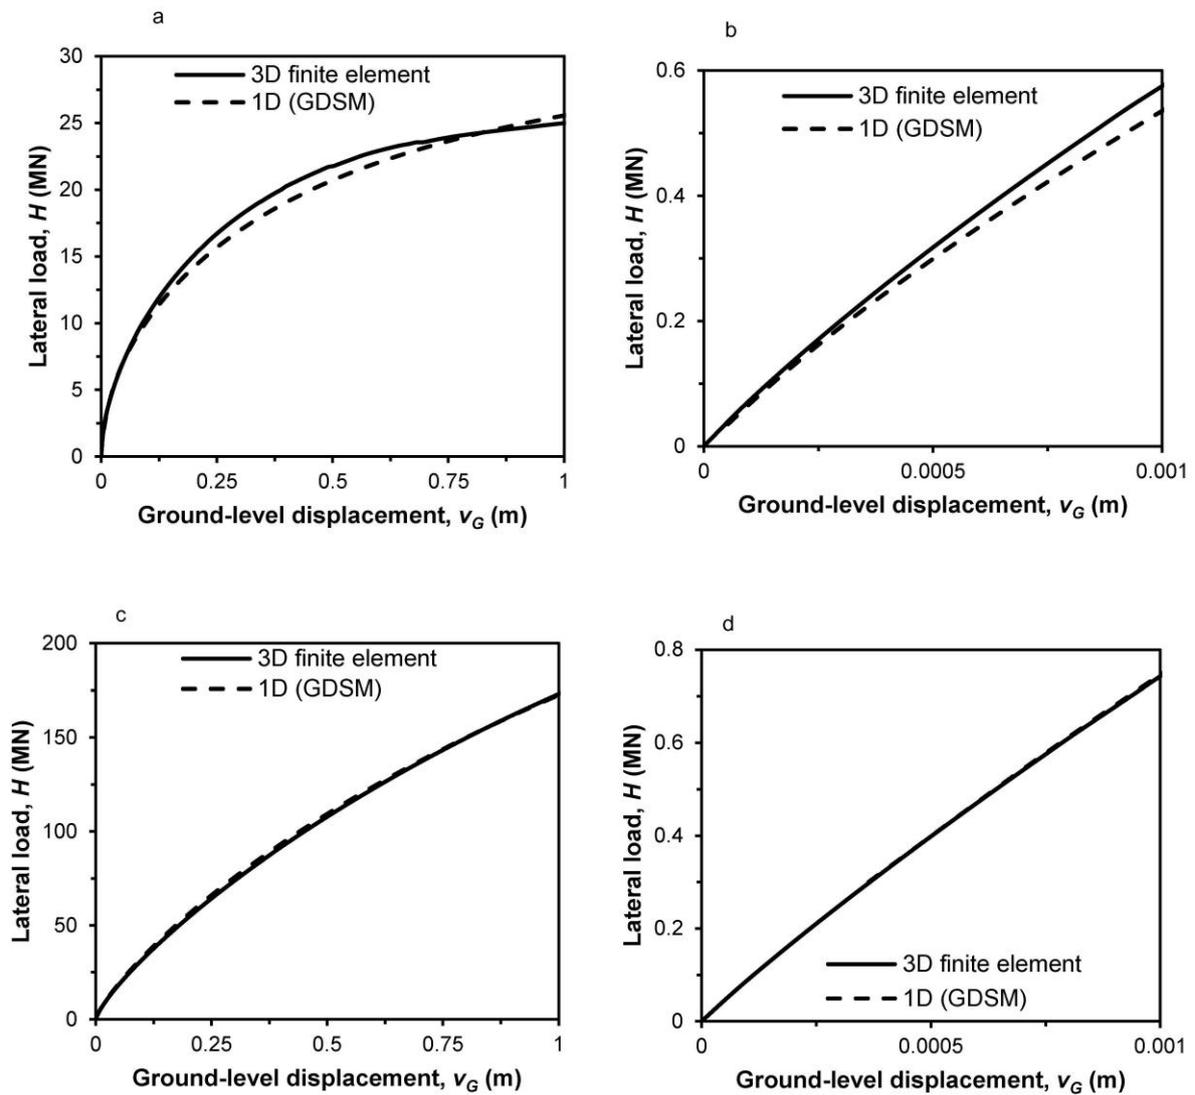


Figure 13

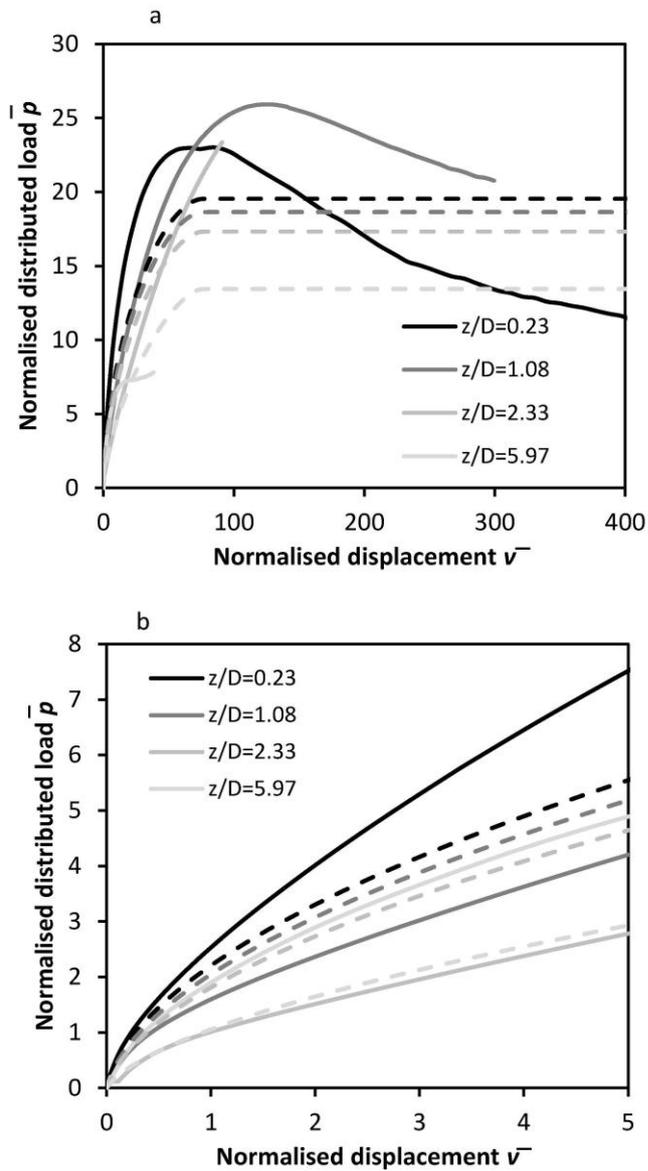


Figure 14

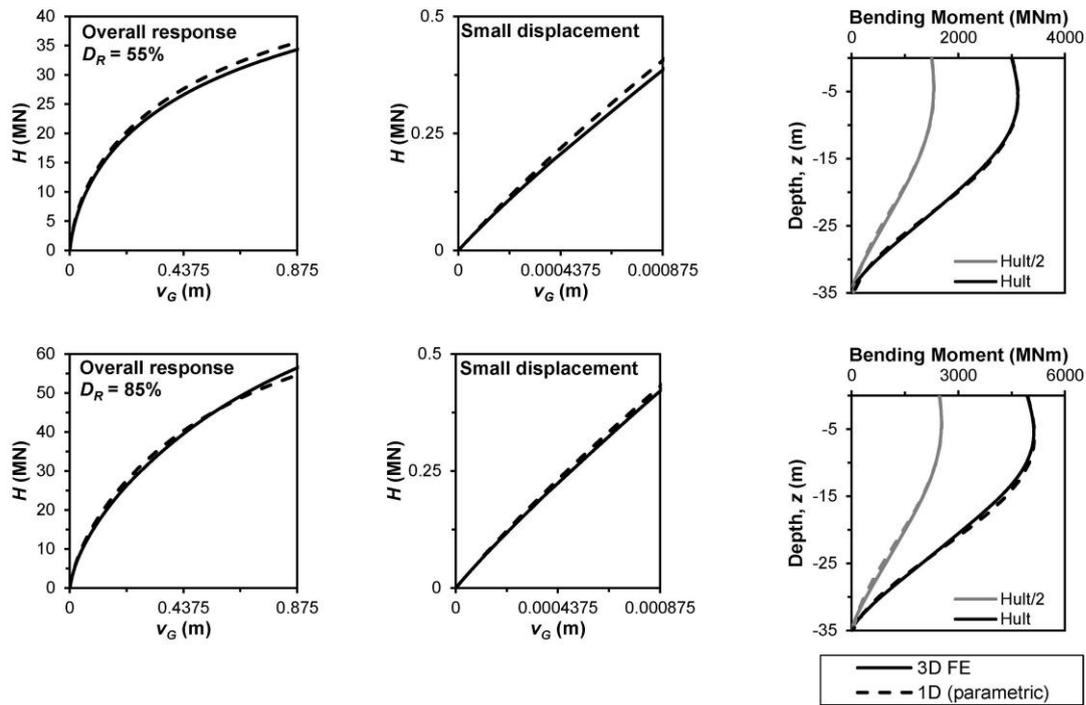


Figure 15

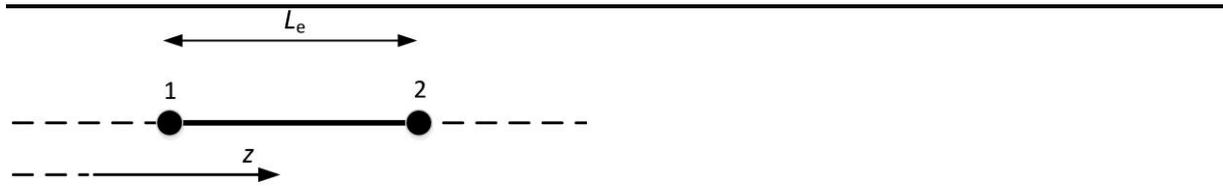


Figure 16